




OTANI®
DRIVING CONFIDENCE



PRODUCT CATALOGUE




PASSENGER CAR & LIGHT TRUCK (PCLT) TIRES

PRODUCT DEVELOPMENT

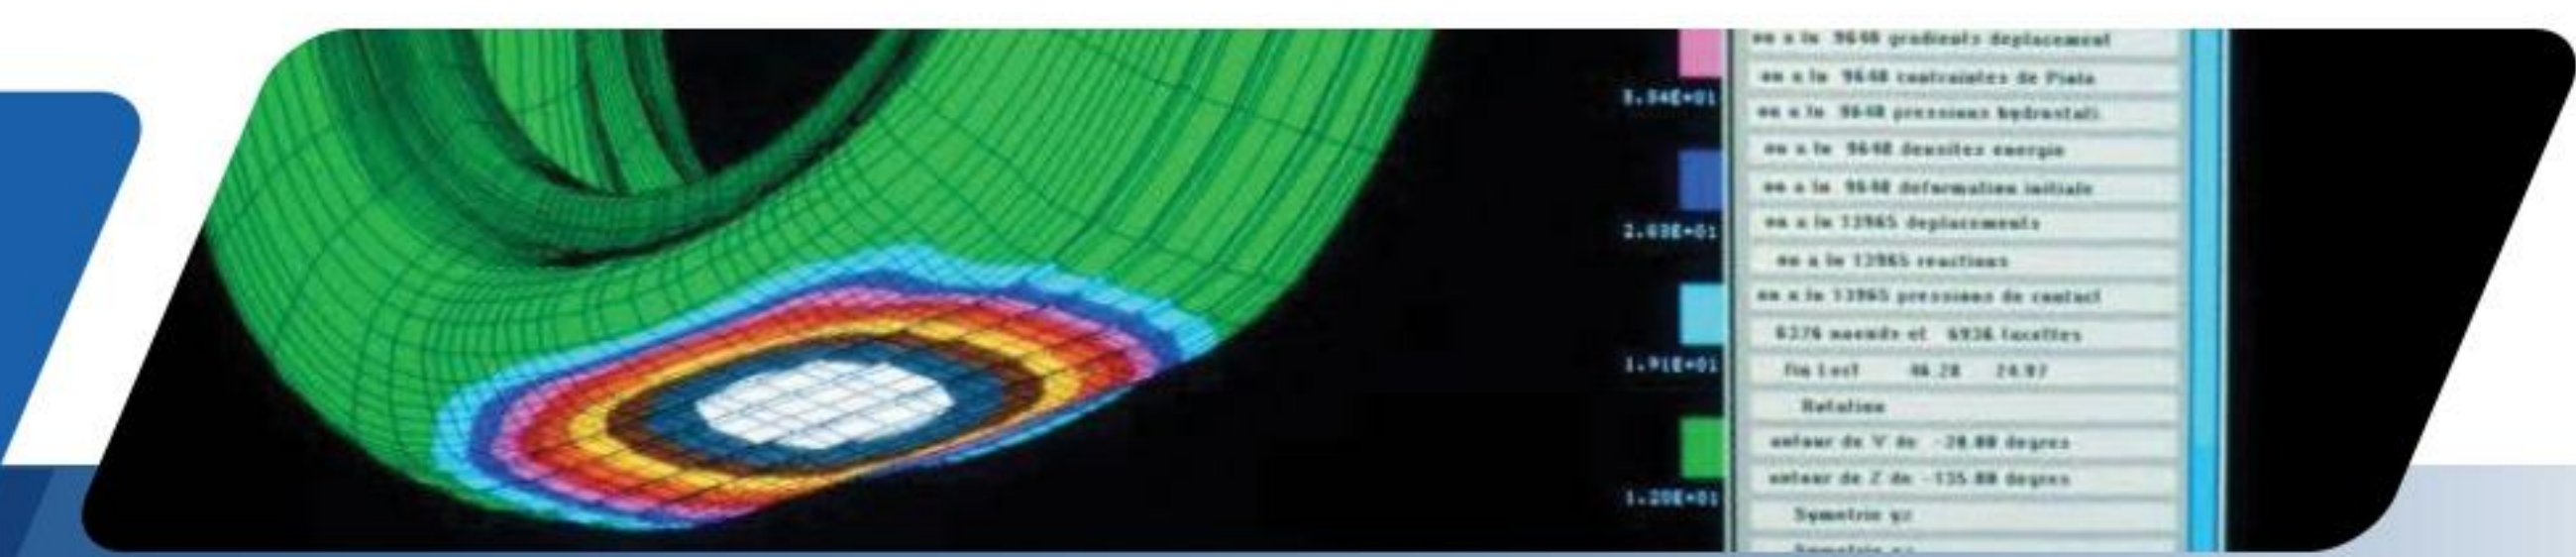

Design & Testing

Design simulations

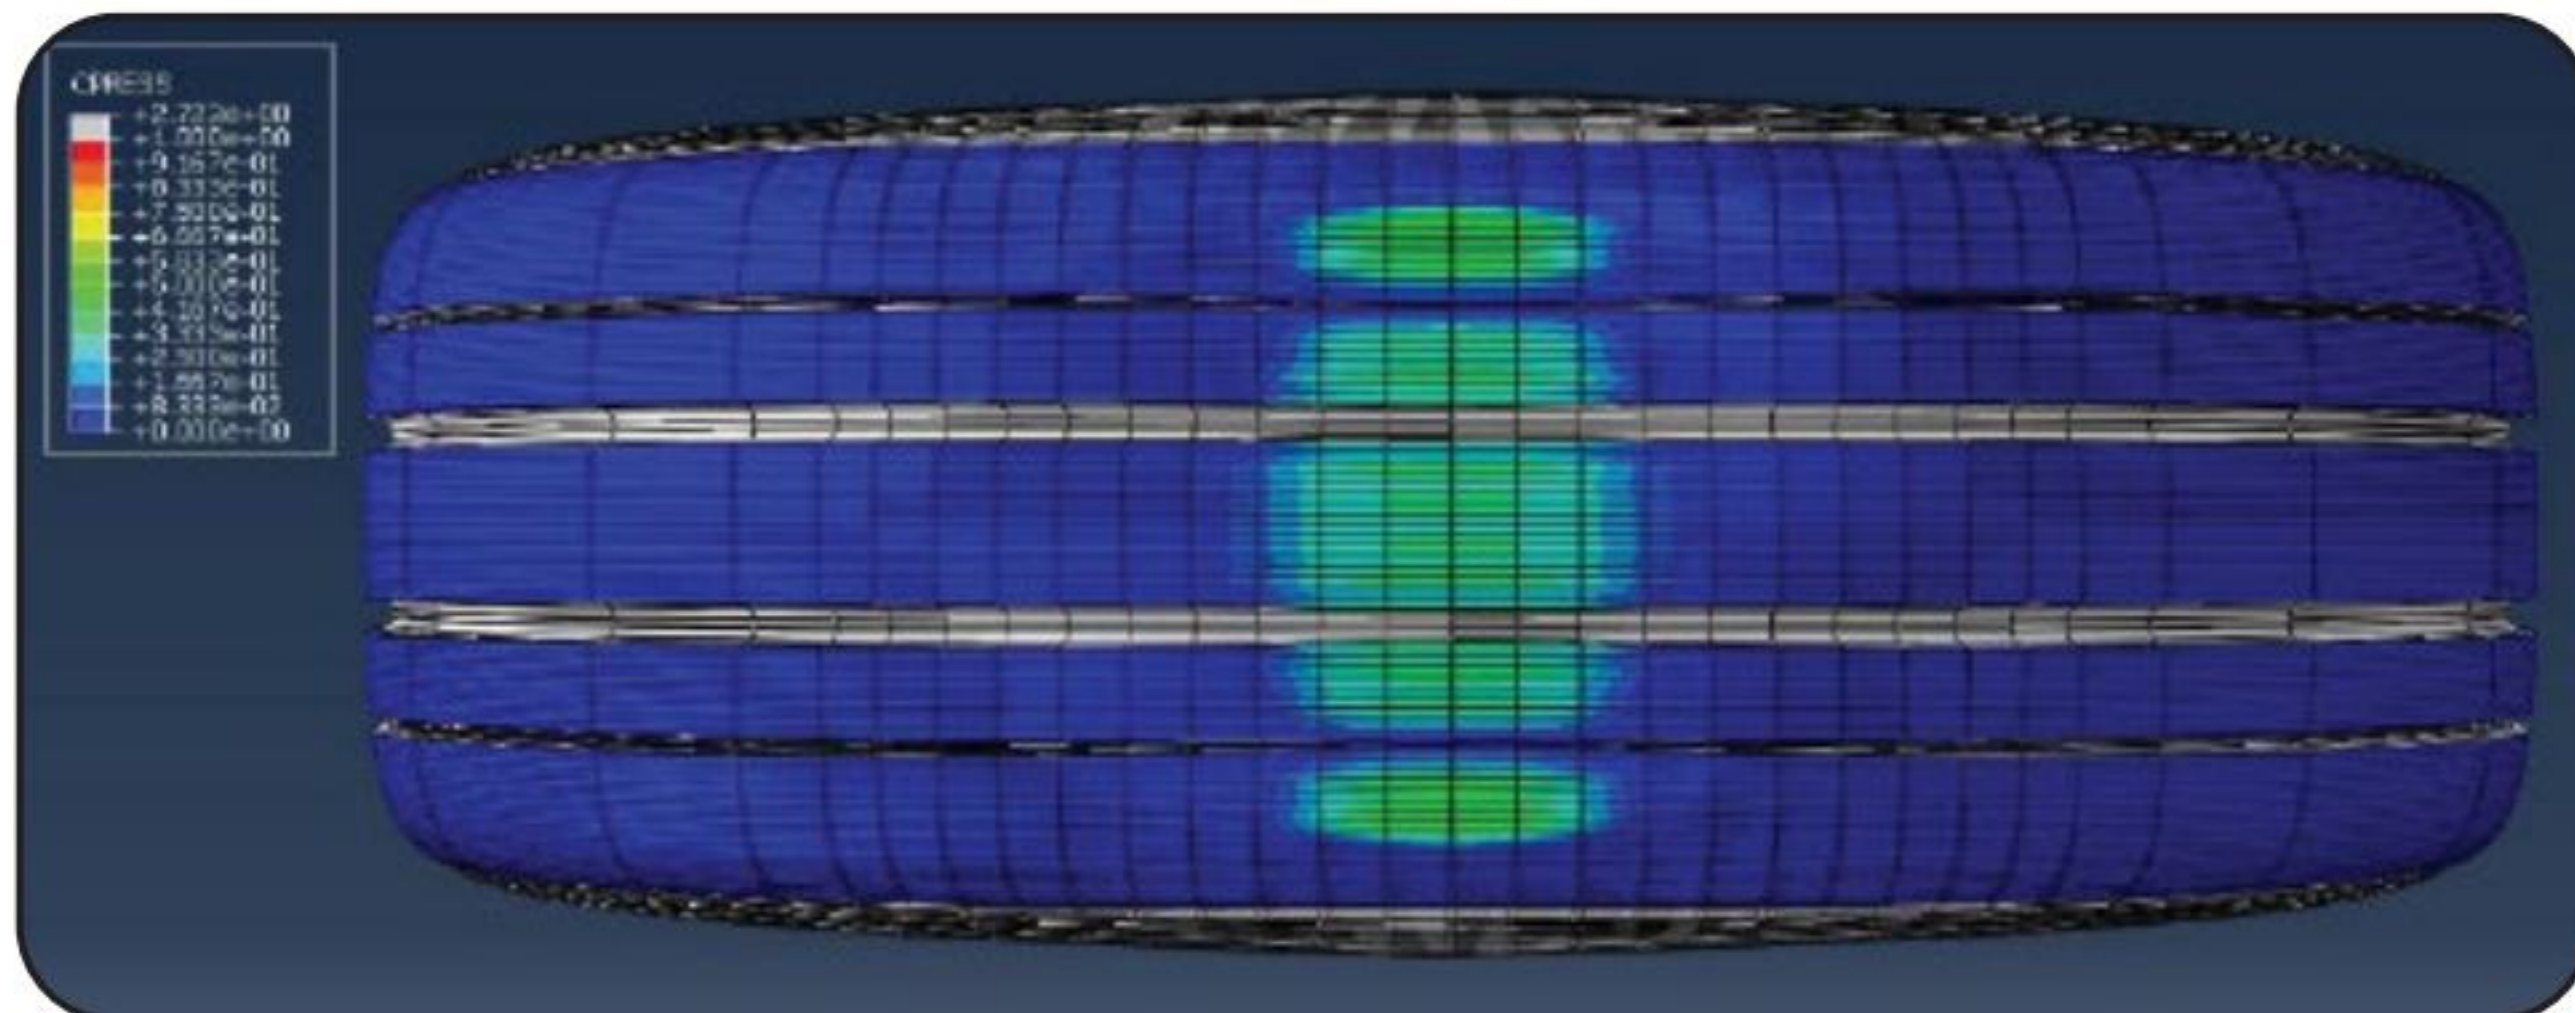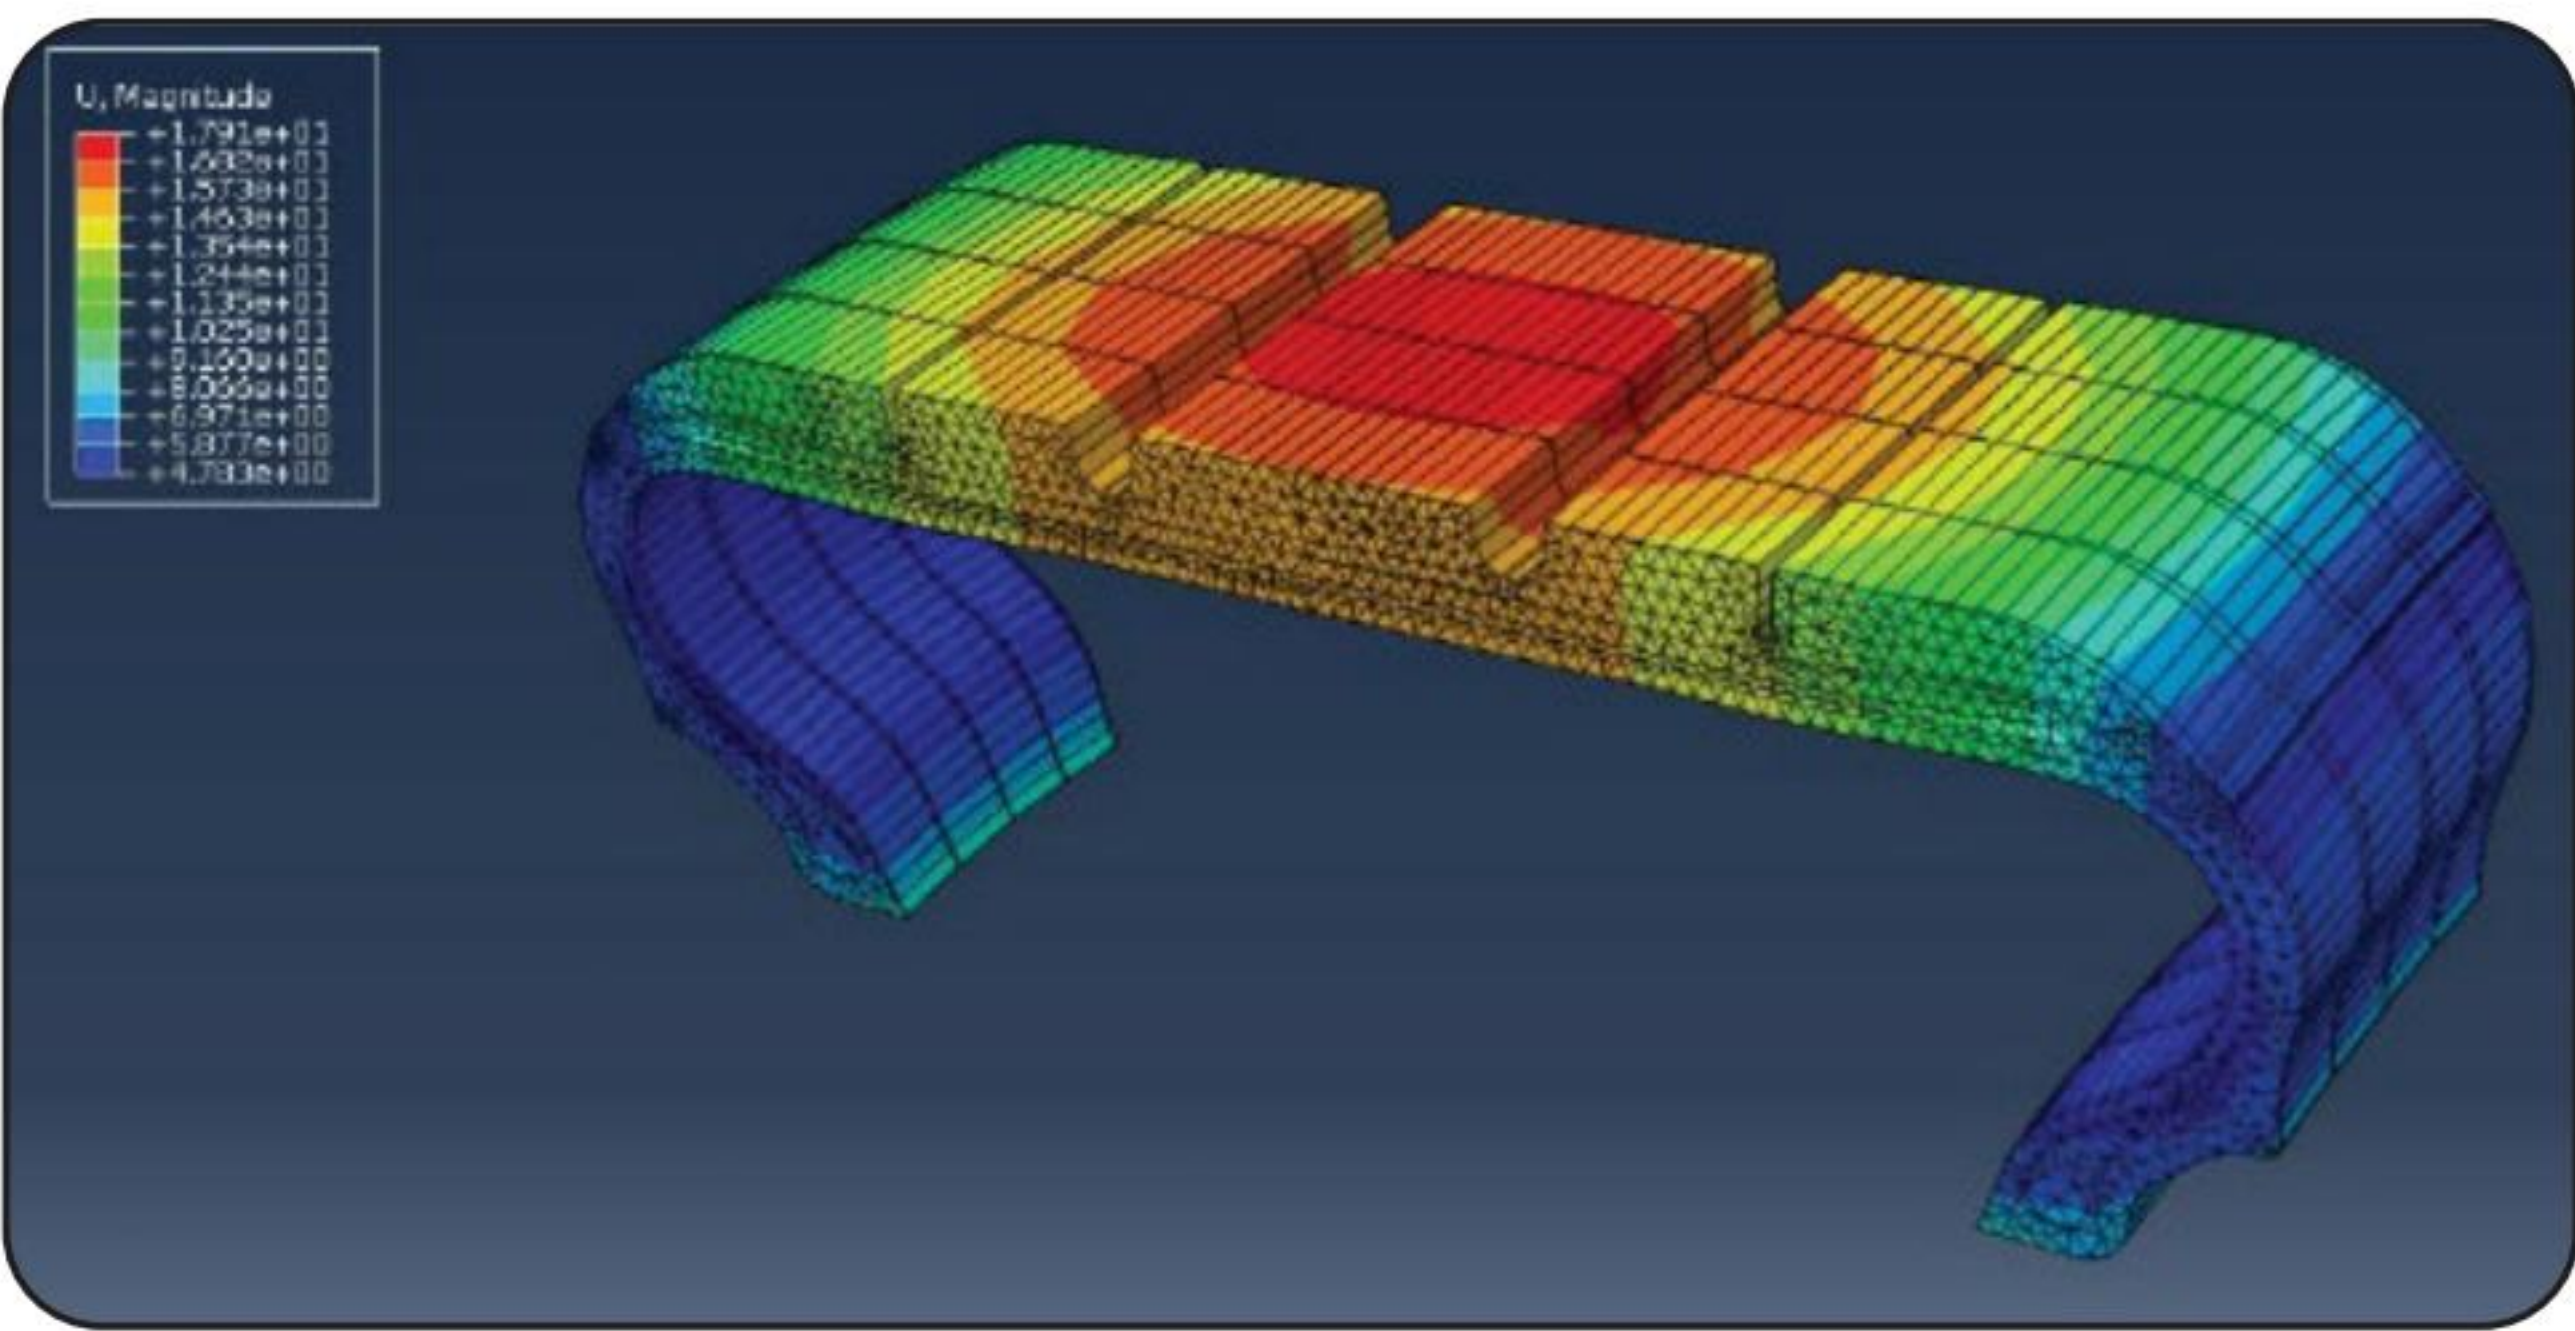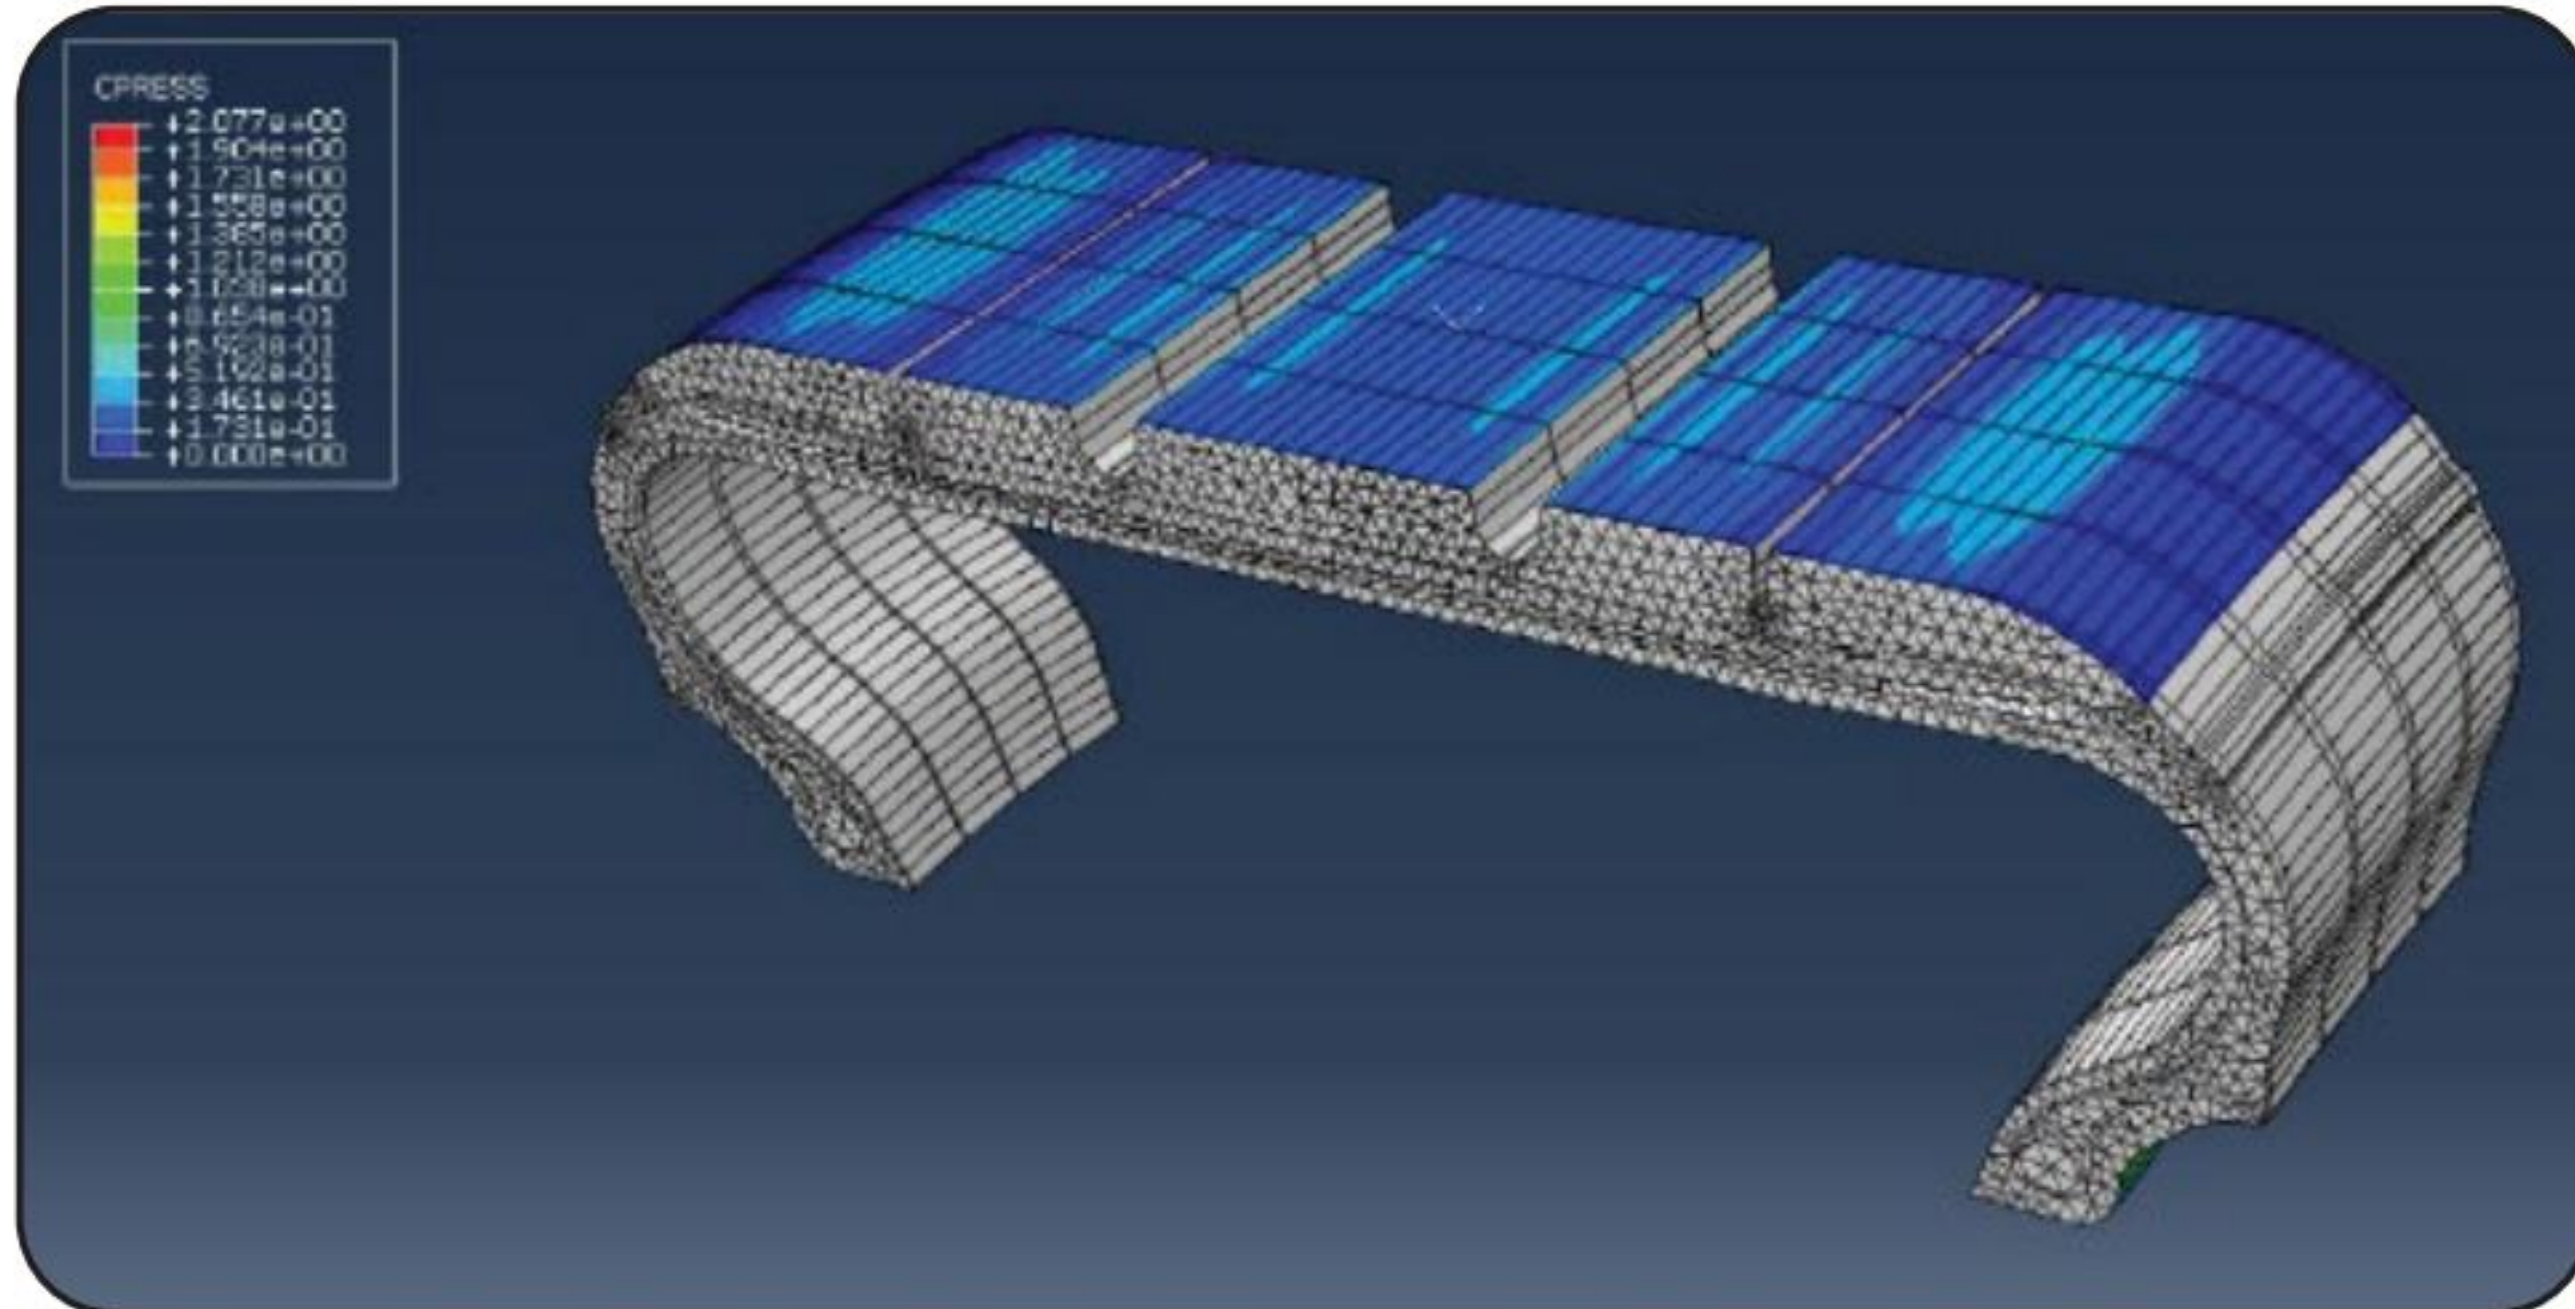

Product testing



Tire durability & High speed test



Rolling Resistance



Comfort/Handling/Noise/Grip






EK1000

For Passenger Cars


EK1000



Asymmetrical tread design that offers remarkable grip on both dry & wet conditions.

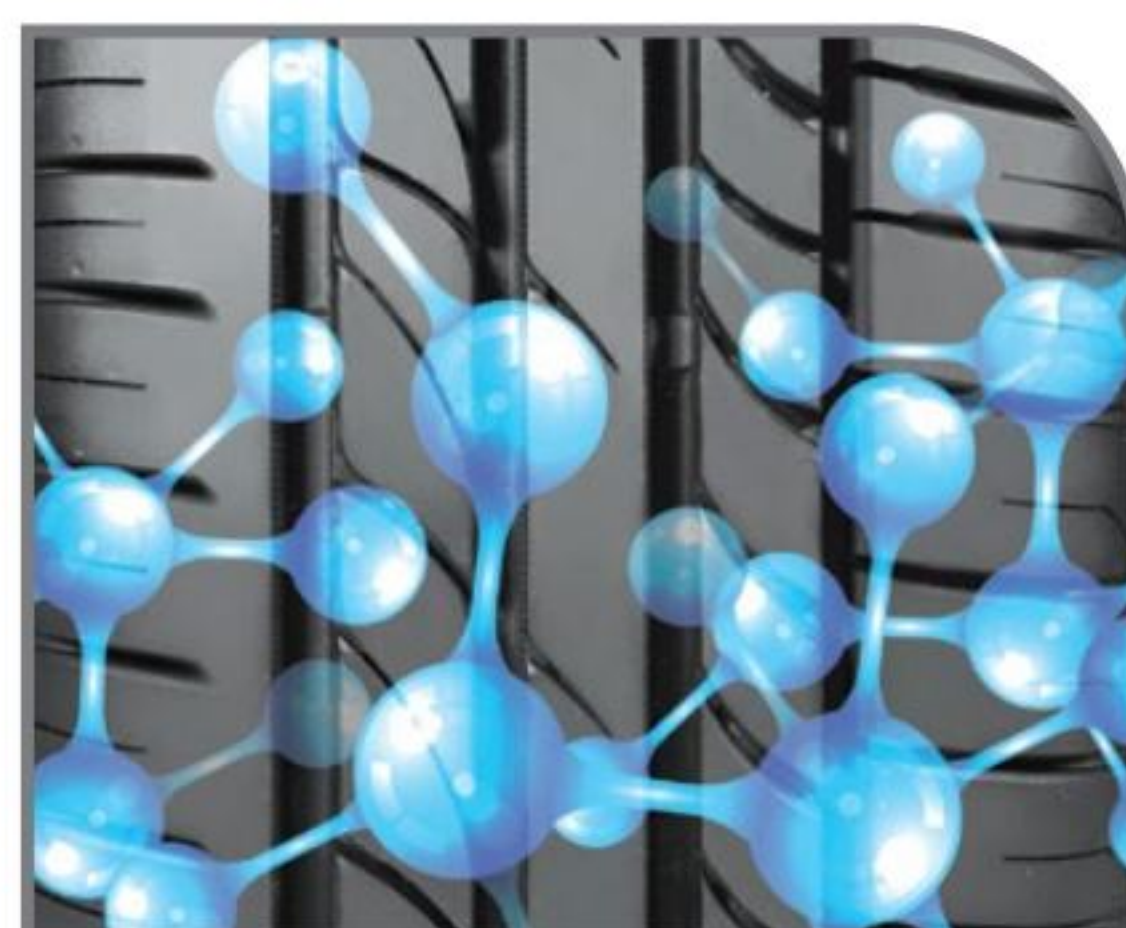

Special tread compound that delivers unmatched driving comfort performance at high speed.

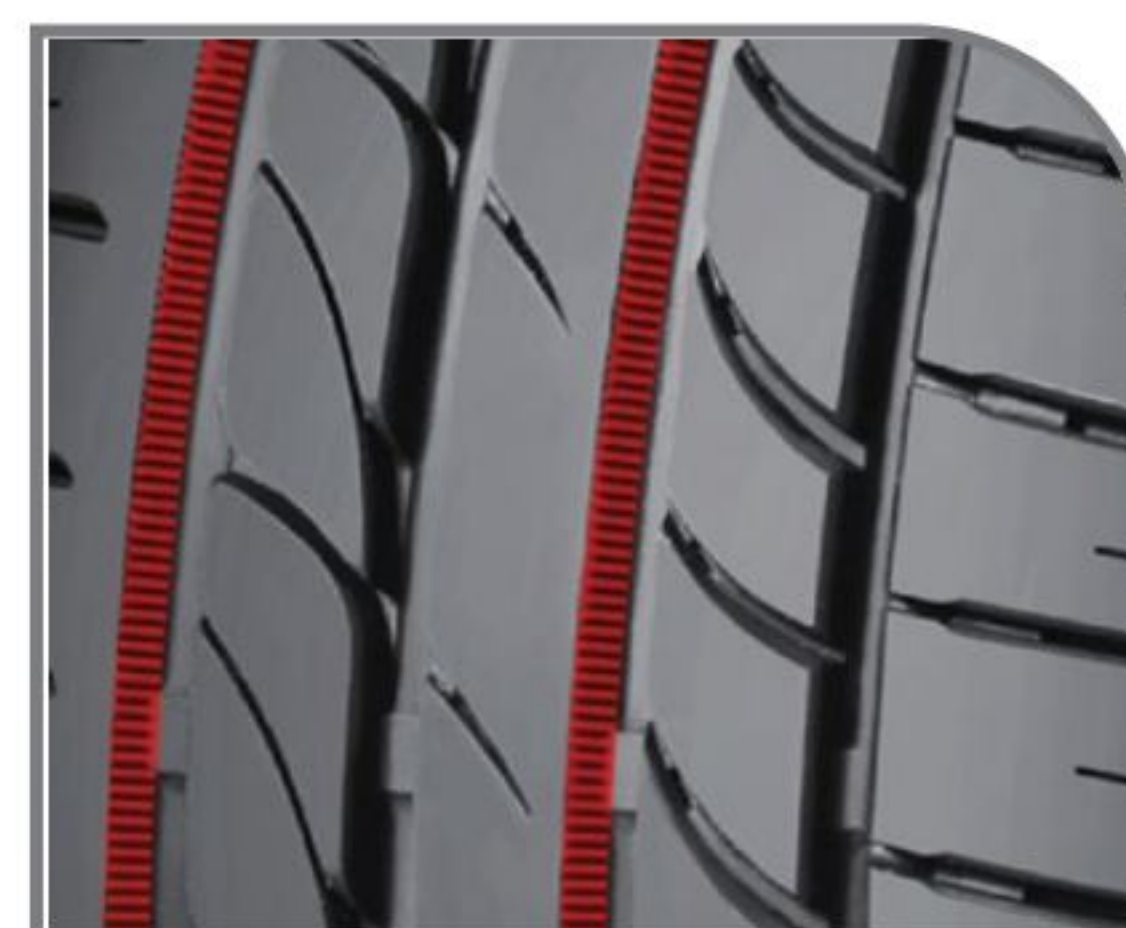

Low Noise Groove Design enables it to be a silent performer.

Series	Size	Load & Speed Index	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			kgs	psi	inches	mm	mm	mm
70 Series	145/70R13	71T	345	44	4.5	150	534	7.6
	175/70R13*	82T	475	44	5.0	182	574	7.3
	175/70R14	84V	500	44	5.0	181	602	7.4
	185/70R14	88H	560	44	5.5	193	614	7.1
	195/70R14	91H	615	44	6.0	203	627	7.1
	205/70R14	98H XL	750	50	6.0	213	640	7.3
	205/70R15	96V	710	44	6.0	212	667	7.5
	215/70R15	98V	750	44	6.5	223	681	7.5
65 Series	165/65R13	77V	412	44	5.0	167	543	7.5
	165/65R14	79T	437	44	5.0	170	567	7.1
	175/65R14	86V XL	530	50	5.0	179	584	7.5
	185/65R14	86V	530	44	5.5	190	595	7.6
	175/65R15	84V	500	44	5.0	177	610	7.4
	185/65R15	88V	560	44	5.5	189	621	7.5
	195/65R15	91H	615	44	6.0	201	635	7.4
	205/65R15	94V	670	44	6.0	210	646	7.5
	195/65R16	92V	630	44	6.0	200	663	7.4
	215/65R16	98V	750	44	6.5	224	683	7.7
	225/65R16	100V	800	44	6.5	228	695	7.6
	235/65R16	103V	875	44	7.0	241	708	7.7
	215/65R17	99H	775	44	6.5	223	714	7.6



EK1000

For Passenger Cars

EK1000

Series	Size	Load & Speed Index	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			kgs	psi	inches	mm	mm	mm
60 Series	175/60R13	77V	412	44	5.0	175	540	7.6
	165/60R14	75H	387	44	5.0	170	554	7.4
	185/60R14	82H	475	44	5.5	188	575	7.1
	185/60R15	84H	500	44	5.5	189	603	7.5
	195/60R15	88V	560	44	6.0	199	615	7.5
	225/60R16	98H	750	44	6.5	225	673	7.6
	225/60R17	99V	775	44	6.5	226	705	7.7
	225/60R18	100H	800	44	6.5	230	729	7.6
55 Series	185/55R15	82V	475	44	6.0	192	585	7.4
	195/55R15	85V	515	44	6.0	201	595	7.5
	185/55R16	83V	487	44	6.0	194	610	7.7
50 Series	175/50R15	75H	387	44	5.5	182	557	7.4
	195/50R15	82V	475	44	6.0	195	580	7.5
	195/50R16	84V	500	44	6.0	192	608	7.5

* Available in BSW & WSW sidewall styles




EK1000

For Passenger Cars

Test Results

Subjective evaluation test (Ride & Handling)

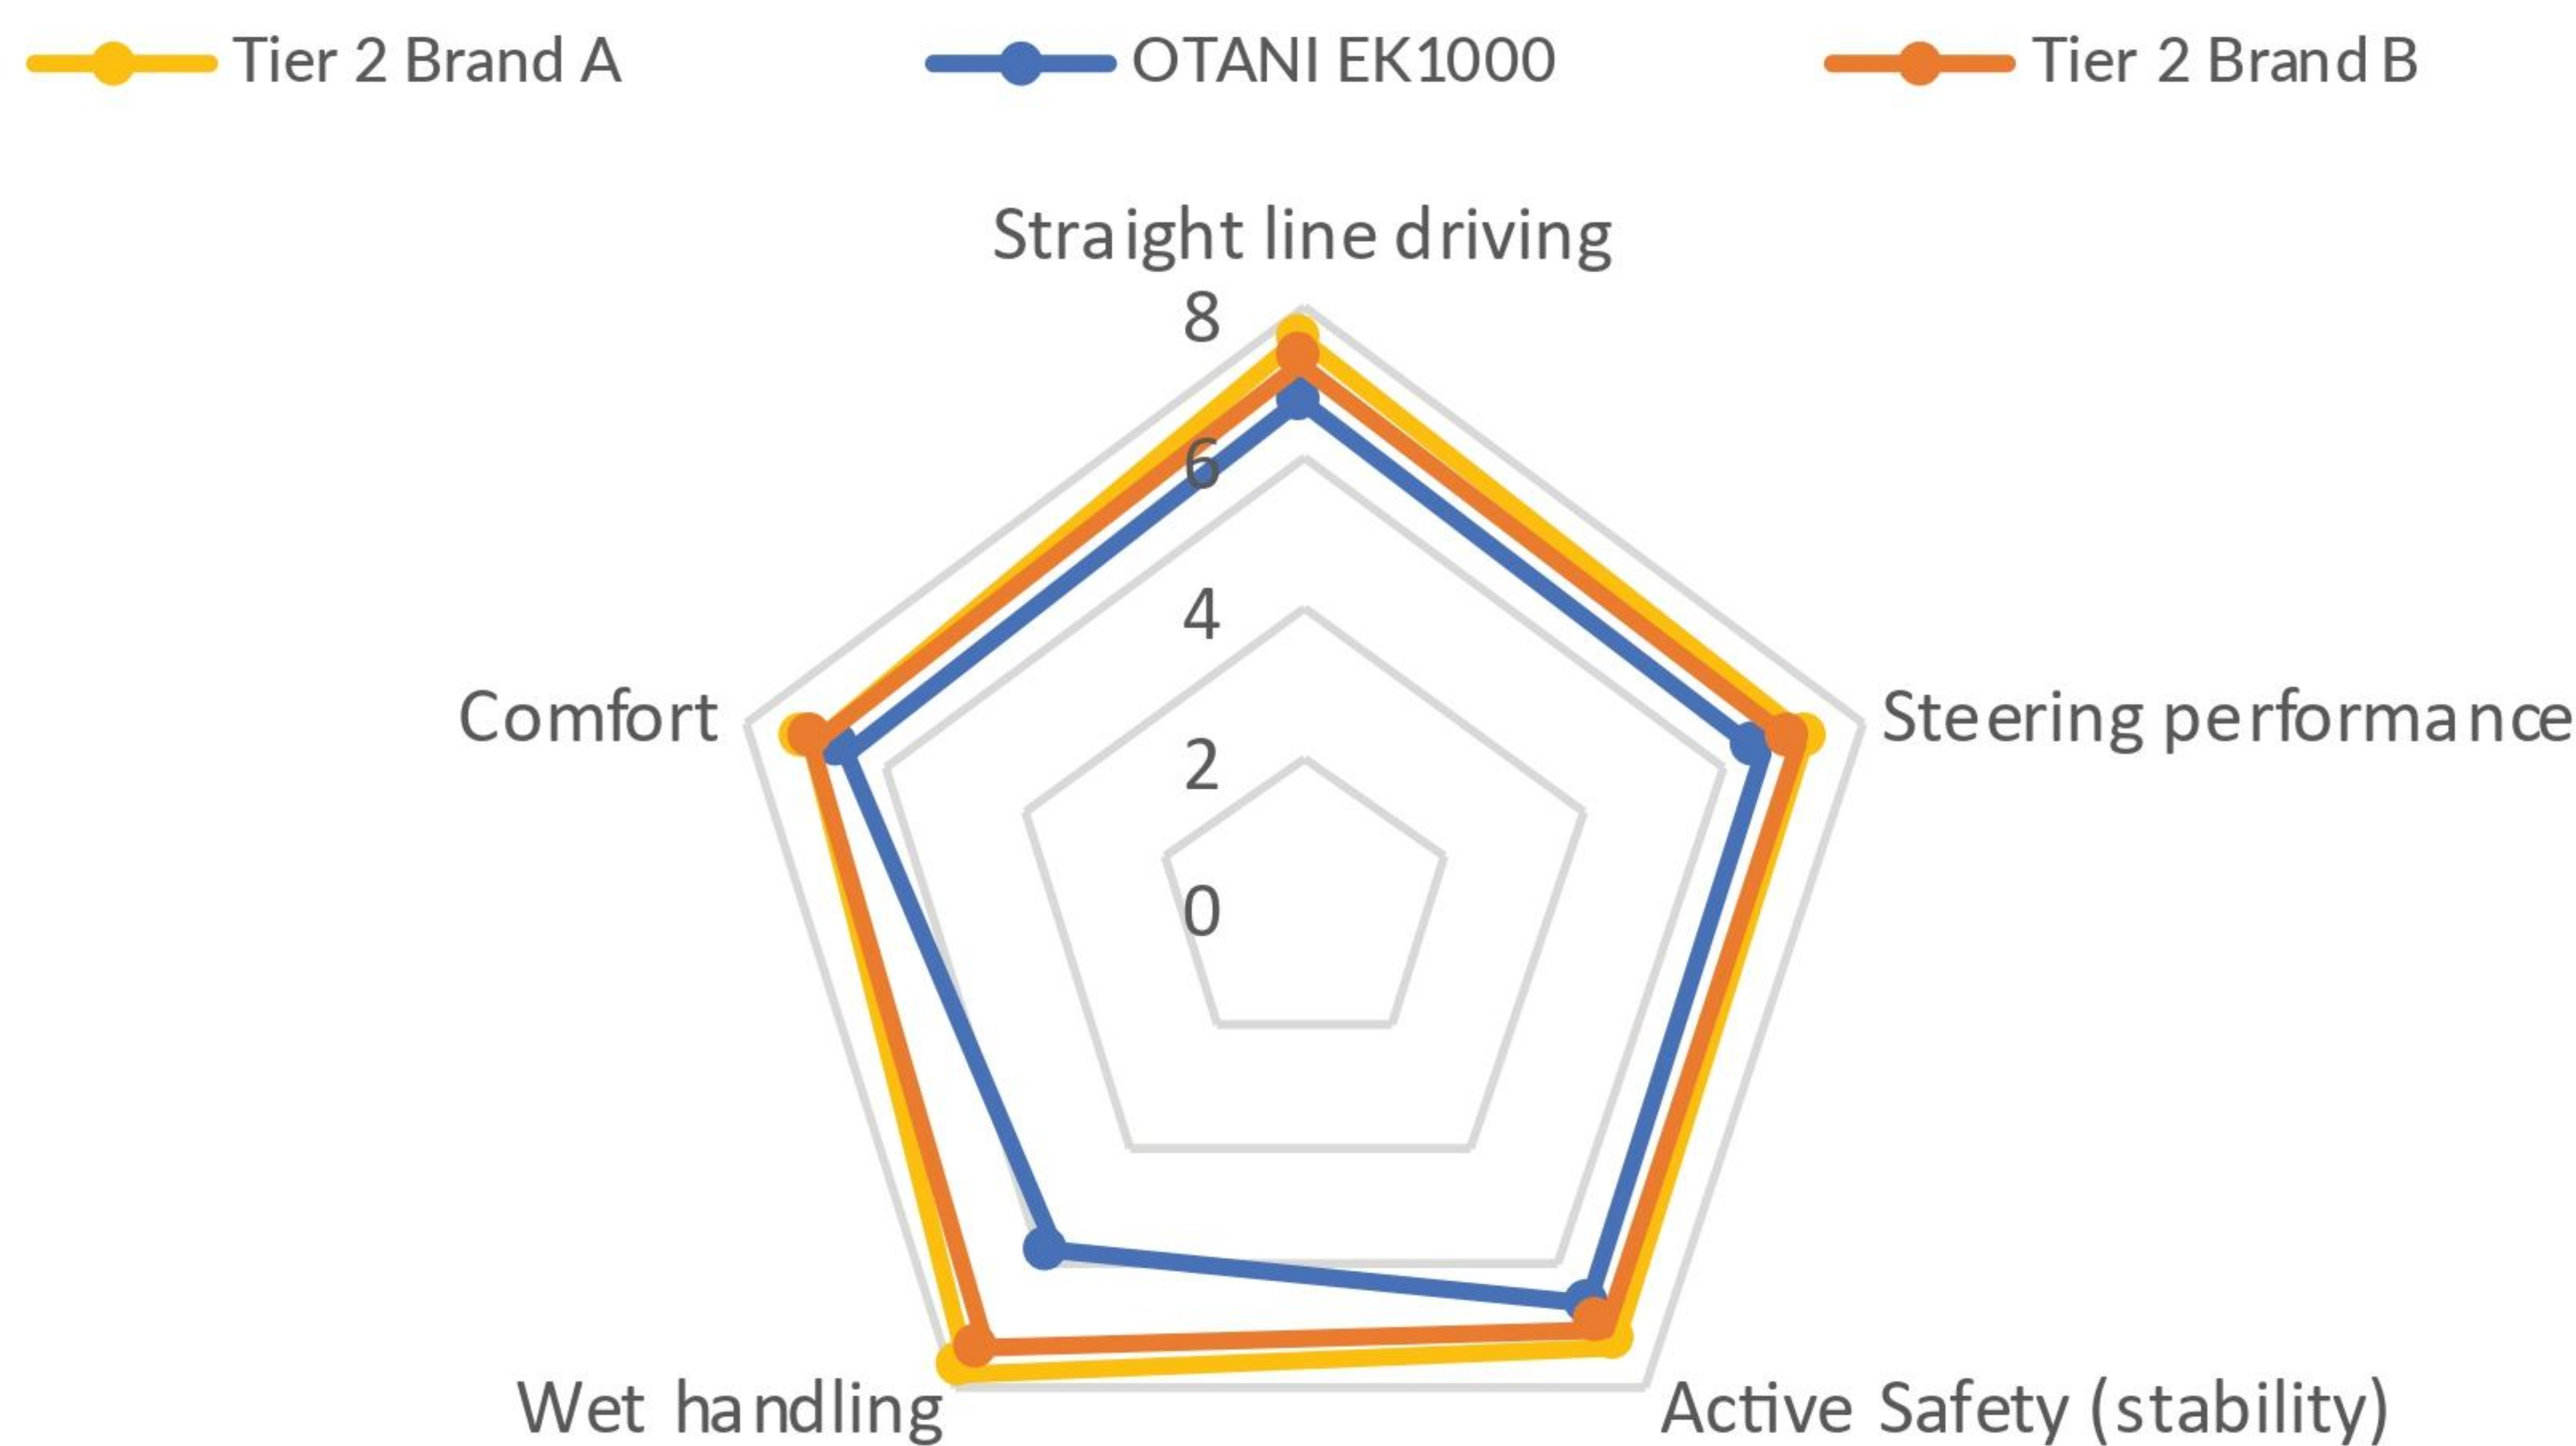

Internal Noise


Overall





EK1000

For Passenger Cars

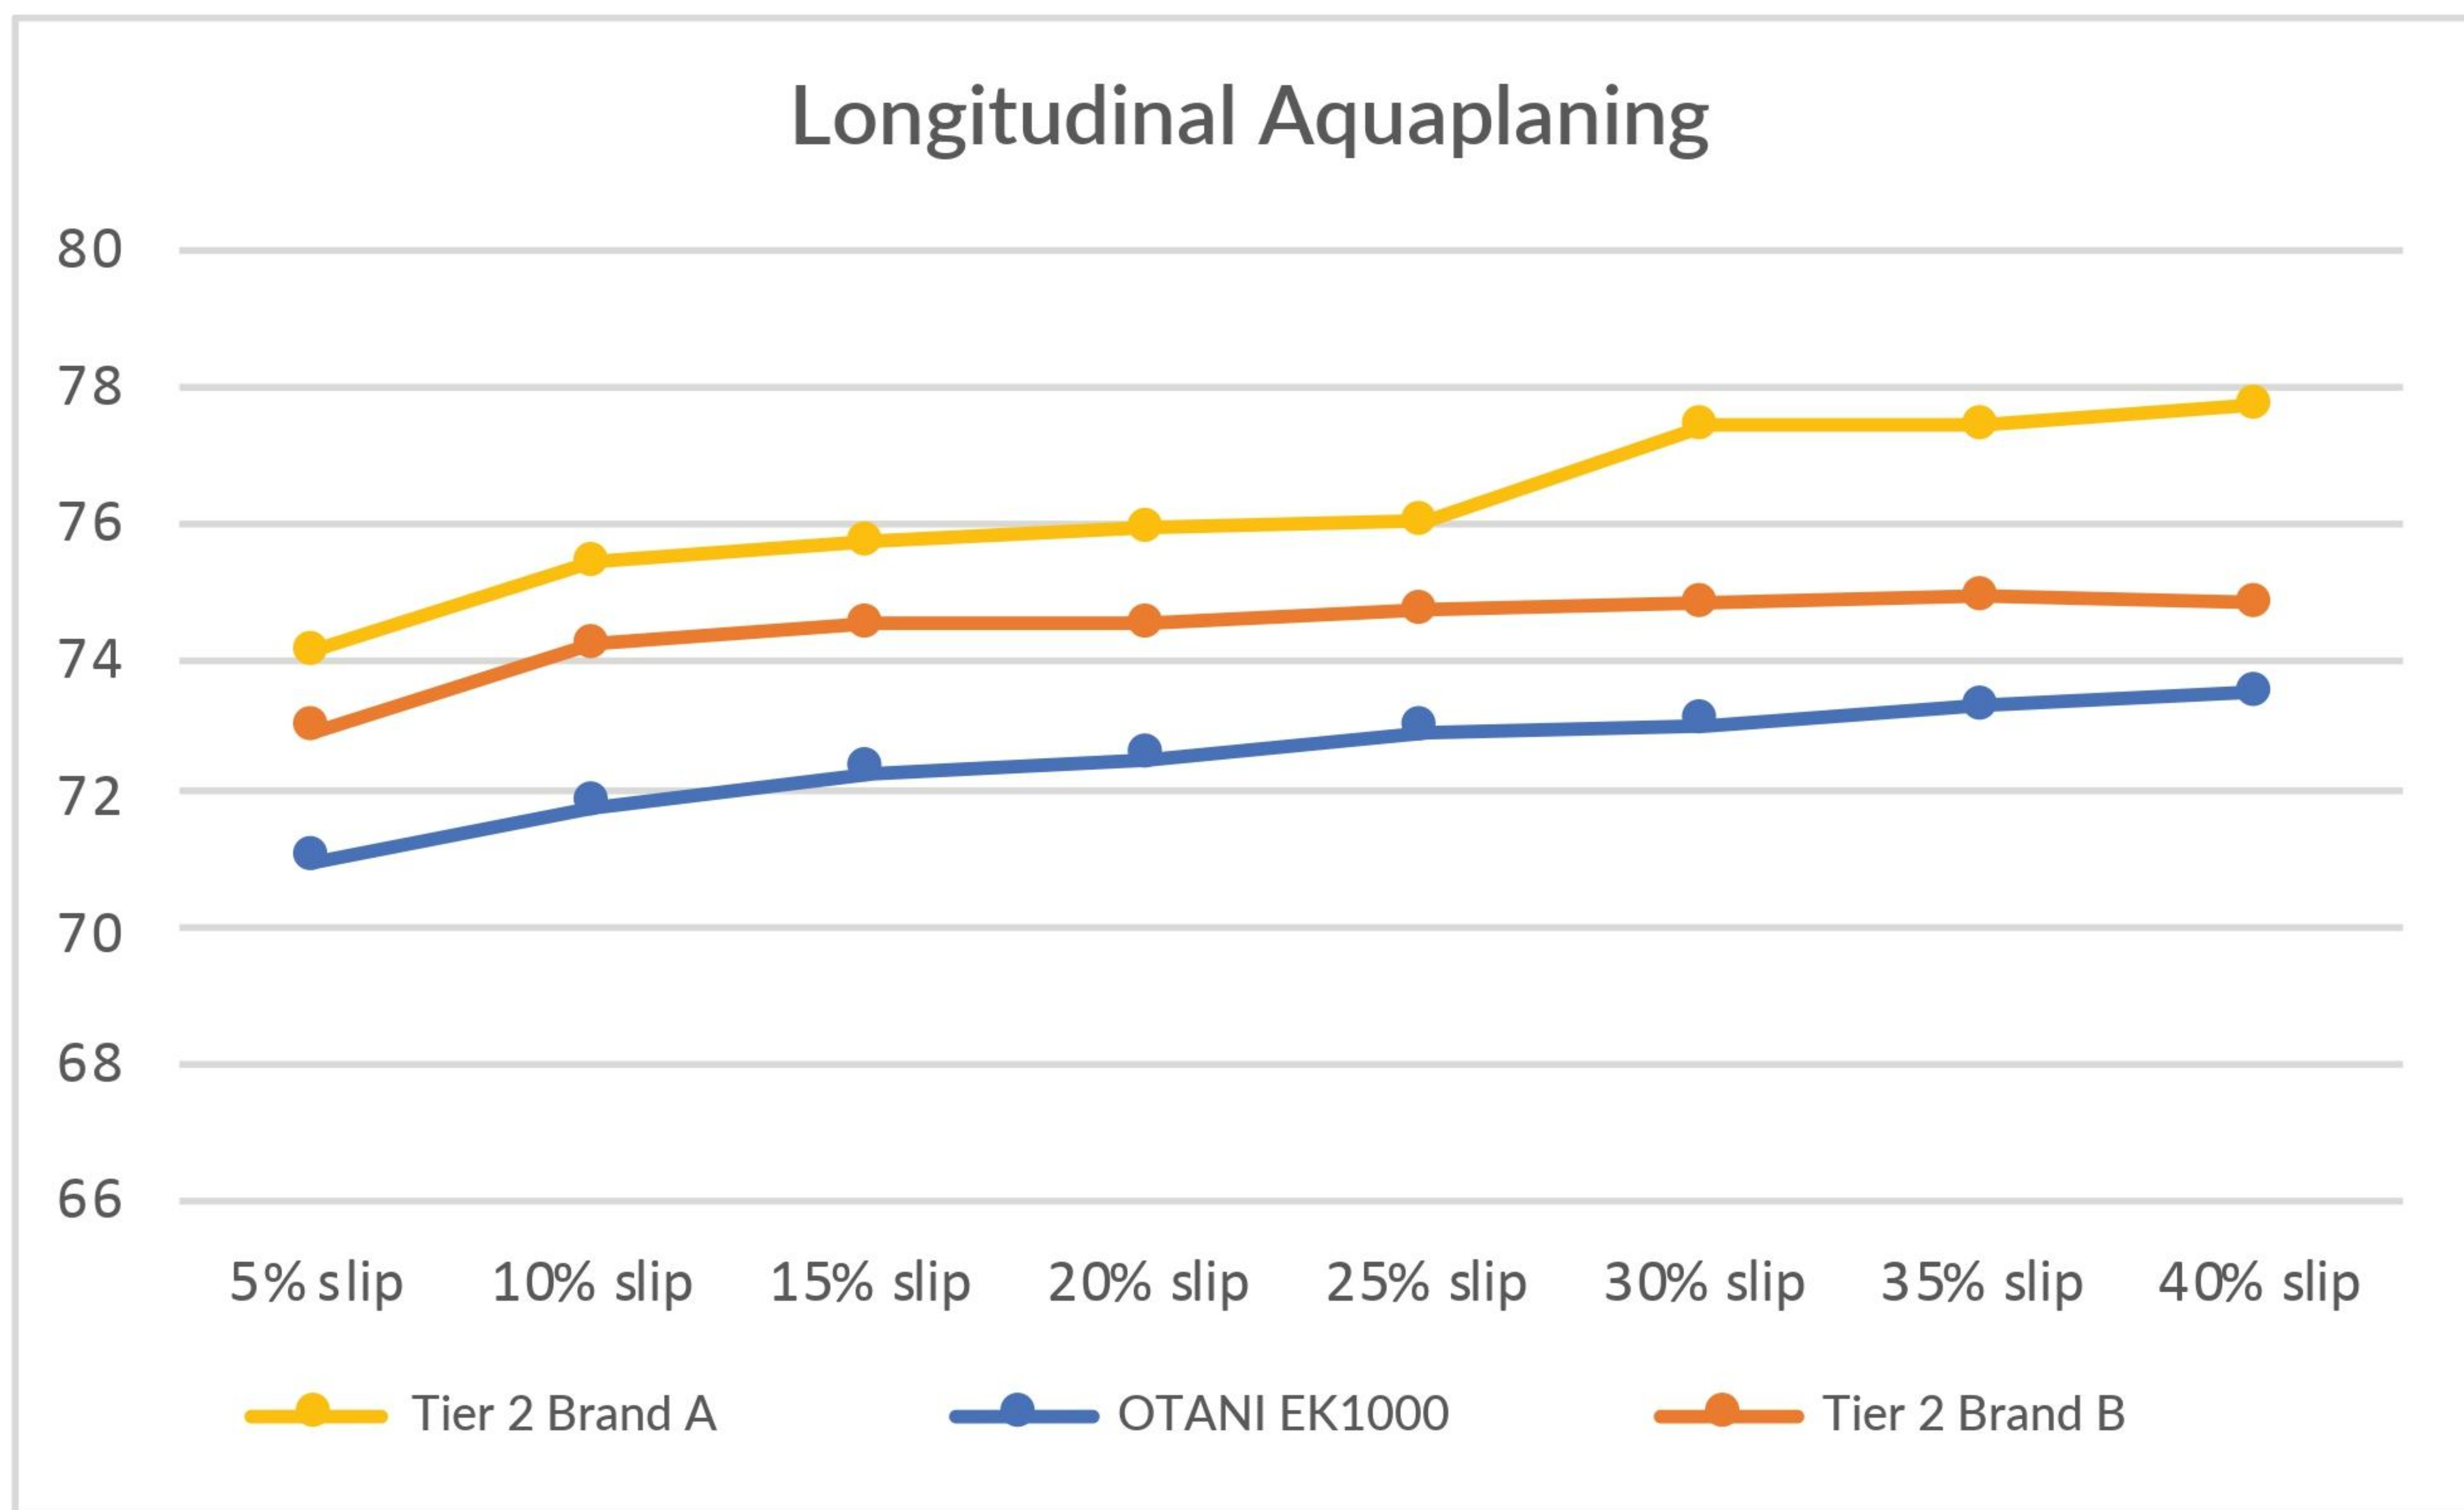



EK2000

For Passenger Cars

EK2000



Efficient tread design for water evacuation, braking distance and improved wet handling performance.



Various tread patterns reduce noise. makes driving omfortable and soft



Efficiently improved tread formula contributes to longer life, traction and fuel efficiency.

Series	Size	Load & Speed Index	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			kgs	psi	inches	mm	mm	mm
70 Series	205/70R15	96H	710	44	6.0	215	666	7.5
	215/70R15	98H	750	44	6.5	226	680	7.5
65 Series	185/65R14	86H	530	44	5.5	190	595	7.7
	185/65R15	88H	560	44	5.5	191	622	7.5
	195/65R15	91H	615	44	6.0	203	634	7.4
	205/65R15	94H	670	44	6.0	206	645	7.5
	205/65R16	95H	690	44	6.0	205	670	7.6
60 Series	195/60R15	88H	560	44	6.0	197	618	7.5
	205/60R16	92H	630	44	6.0	205	653	7.7
	215/60R16	95H	690	44	6.5	223	668	7.8
	225/60R16	98H	750	44	6.5	225	676	8.2
55 Series	205/55R16	91H	615	44	6.5	211	635	7.5
	215/55R16	93H	650	44	7.0	226	642	7.8
	215/55R17	94H	670	44	7.0	225	669	8.3

KC1000

For Premium High-performance and Luxury Vehicles

KC1000



Optimized tread pattern design with “noise reduction” bars and multi-pitches provide quiet driving experience



Rigid outer side tread with new longitudinal grooves design offers enhanced steering control on both wet and dry roads and comfortable driving



New sidewall construction & improved tread compound ensure excellent grip & fuel saving

Series	Size	Load & Speed Index	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			kgs	psi	inches	mm	mm	mm
65 Series	185/65R15*	88V	560	44	5.0	186	623	8.1
60 Series	185/60R15*	84V	500	44	5.5	186	603	8.0
	195/60R15*	88V	560	44	6.0	198	617	8.3
55 Series	195/55R15*	85W	515	44	6.0	198	596	7.8
	205/55ZR16	94W XL	670	50	6.5	210	631	7.5
	205/55ZR17	91Y	615	44	6.5	210	663	7.8
	215/55ZR17	98W XL	750	50	7.0	225	671	7.3
	225/55ZR17	101W XL	825	50	7.0	227	685	7.4
	235/55ZR18	104W XL	900	50	7.0	240	716	7.4
50 Series	195/50R15*	82W	475	44	6.0	194	579	7.7
	215/50ZR17	95W XL	690	50	7.0	218	651	7.7
	225/50ZR17	98W XL	750	50	7.0	226	660	7.8
	245/50ZR19	105W XL	925	50	7.5	248	732	7.2
45 Series	205/45ZR17	88Y XL	560	50	7.0	205	620	7.3
	215/45ZR17	91Y XL	615	50	7.0	210	631	7.5
	225/45ZR18	95Y XL	690	50	7.5	222	664	7.4
	235/45ZR18	98W XL	750	50	8.0	234	672	7.3
	245/45ZR18	100Y XL	800	50	8.0	238	678	7.5
	225/45ZR19	96Y XL	710	50	7.5	221	692	7.5
	245/45ZR20	103W XL	875	50	8.0	240	727	7.3
	255/45ZR20	105Y XL	925	50	8.5	252	739	7.5
40 Series	255/40ZR18	99W XL	775	50	8.5	255	664	7.1
	275/40ZR18	103Y XL	875	50	9.5	227	678	7.5
	225/40ZR19	93Y XL	650	50	8.0	224	672	7.4
	245/40ZR19	98Y XL	750	50	8.0	239	685	7.4
	245/40ZR20*	99Y XL	775	50	8.5	243	707	7.1
	275/40ZR20	106W XL	950	50	9.0	274	734	7.7
	265/40ZR22	106Y XL	950	50	9.5	267	775	7.4
35 Series	235/35ZR19	91Y XL	615	50	8.0	237	651	7.4
	245/35ZR19	93W XL	650	50	8.0	241	664	7.6
	255/35ZR19	96Y XL	710	50	9.0	254	666	7.8
	275/35ZR19	100Y XL	800	50	9.5	270	674	7.5
	315/35ZR20	110Y XL	1060	50	11.0	313	728	7.3

* Newly added sizes

KC2000

For High-performance and Luxury Vehicles

KC2000



Sporty asymmetrical tread design that provides unparalleled stability for high performance cars.



Unique tread compound that delivers shorter braking distance and higher fuel efficiency.



Serrations on groove walls reduce pipe resonance noise, making it extremely silent tire.

Series	Size	Load & Speed Index	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			kgs	psi	inches	mm	mm	mm
60 Series	205/60R14	88H	560	44	6.0	207	599	8.0
	205/60R15	91V	615	44	6.0	206	627	7.4
	205/60R16	92V	630	44	6.0	204	653	7.5
	215/60R16	99V XL	775	50	6.5	219	664	7.3
55 Series	205/55ZR16*	91V	615	44	6.5	210	631	7.5
	205/55ZR16	94Y XL	670	50	6.5	213	630	7.5
	215/55ZR16	97W XL	730	50	7.0	226	639	7.2
	225/55ZR16	99Y XL	775	50	7.0	229	651	7.3
	215/55ZR17	98W XL	750	50	7.0	225	671	7.3
	225/55ZR17	101W XL	825	50	7.0	230	683	7.3
	235/55ZR17	103W XL	875	50	7.5	242	692	7.3
	235/55ZR18	104W XL	900	50	7.5	240	716	7.4
	225/55ZR19	99W	775	44	7.0	237	736	7.3
	235/55ZR19	105W XL	925	50	7.5	246	740	7.3
	245/55ZR19	103W	875	44	7.5	255	753	7.3
	235/55ZR20	105W XL	925	50	7.5	250	766	7.3
50 Series	205/50ZR16	91W XL	615	50	6.5	206	612	7.4
	205/50ZR17	93Y XL	650	50	6.5	208	642	7.5
	215/50ZR17	95W XL	690	50	7.0	218	650	7.3
	225/50ZR17	98Y XL	750	50	7.0	224	662	7.4
	235/50ZR17	96W	710	44	7.5	240	671	7.3
	225/50ZR18	95W	690	44	7.0	225	685	7.3
	235/50ZR18	101W XL	825	50	7.5	241	698	7.4
	235/50ZR19	103Y XL	875	50	7.5	240	724	7.3
45 Series	205/45ZR17	88Y XL	560	50	7.0	205	620	7.3
	215/45ZR17	91W XL	615	50	7.0	210	628	7.3
	225/45ZR17	94Y XL	670	50	7.5	222	638	7.5
	235/45ZR17	97Y XL	730	50	8.0	233	647	7.2
	245/45ZR17	99Y XL	775	50	8.0	240	650	7.3
	225/45ZR18	95Y XL	690	50	7.5	223	661	7.4
	235/45ZR18	98W XL	750	50	8.0	235	672	7.4
	245/45ZR18	100Y XL	800	50	8.0	239	675	7.3
	235/45ZR19	99W XL	775	50	8.0	231	697	7.3

* Newly added sizes



KC2000

For High-performance and Luxury Vehicles

KC2000

Series	Size	Load & Speed Index		Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	psi	inches	mm	mm	mm
45 Series	245/45ZR19	98Y		750	44	8.0	237	703	7.2
	245/45ZR20	103W	XL	875	50	8.0	240	727	7.3
	285/45ZR22	114W	XL	1180	50	9.5	285	814	8.1
	305/45ZR22	118W	XL	1320	50	10.0	305	831	8.0
40 Series	225/40ZR18	92Y	XL	630	50	8.0	229	640	7.3
	245/40ZR18	97W	XL	730	50	8.5	241	655	7.5
	235/40ZR19	96W	XL	710	50	8.5	233	672	7.7
	275/40ZR19	105Y	XL	925	50	9.5	275	706	7.4
	275/40ZR20	106W	XL	950	50	9.5	278	727	7.3
	305/40ZR22	114W	XL	1180	50	11.0	313	802	8.0
35 Series	265/35ZR18	97W	XL	730	50	9.5	268	642	7.2
	225/35ZR19	88Y	XL	560	50	8.0	225	645	8.3
	255/35ZR19	96Y	XL	710	50	9.0	254	663	7.3
	245/35ZR20	95Y	XL	690	50	8.5	241	680	8.4
	265/35ZR22	102W	XL	850	50	9.5	267	746	7.1
	305/35ZR24	112W	XL	1120	50	11.0	308	824	7.9
30 Series	285/30ZR19	98Y	XL	750	50	10.0	283	659	7.2




KC2000


For High-performance and Luxury Vehicles

Test Results

Subjective evaluation test (Ride & Handling)

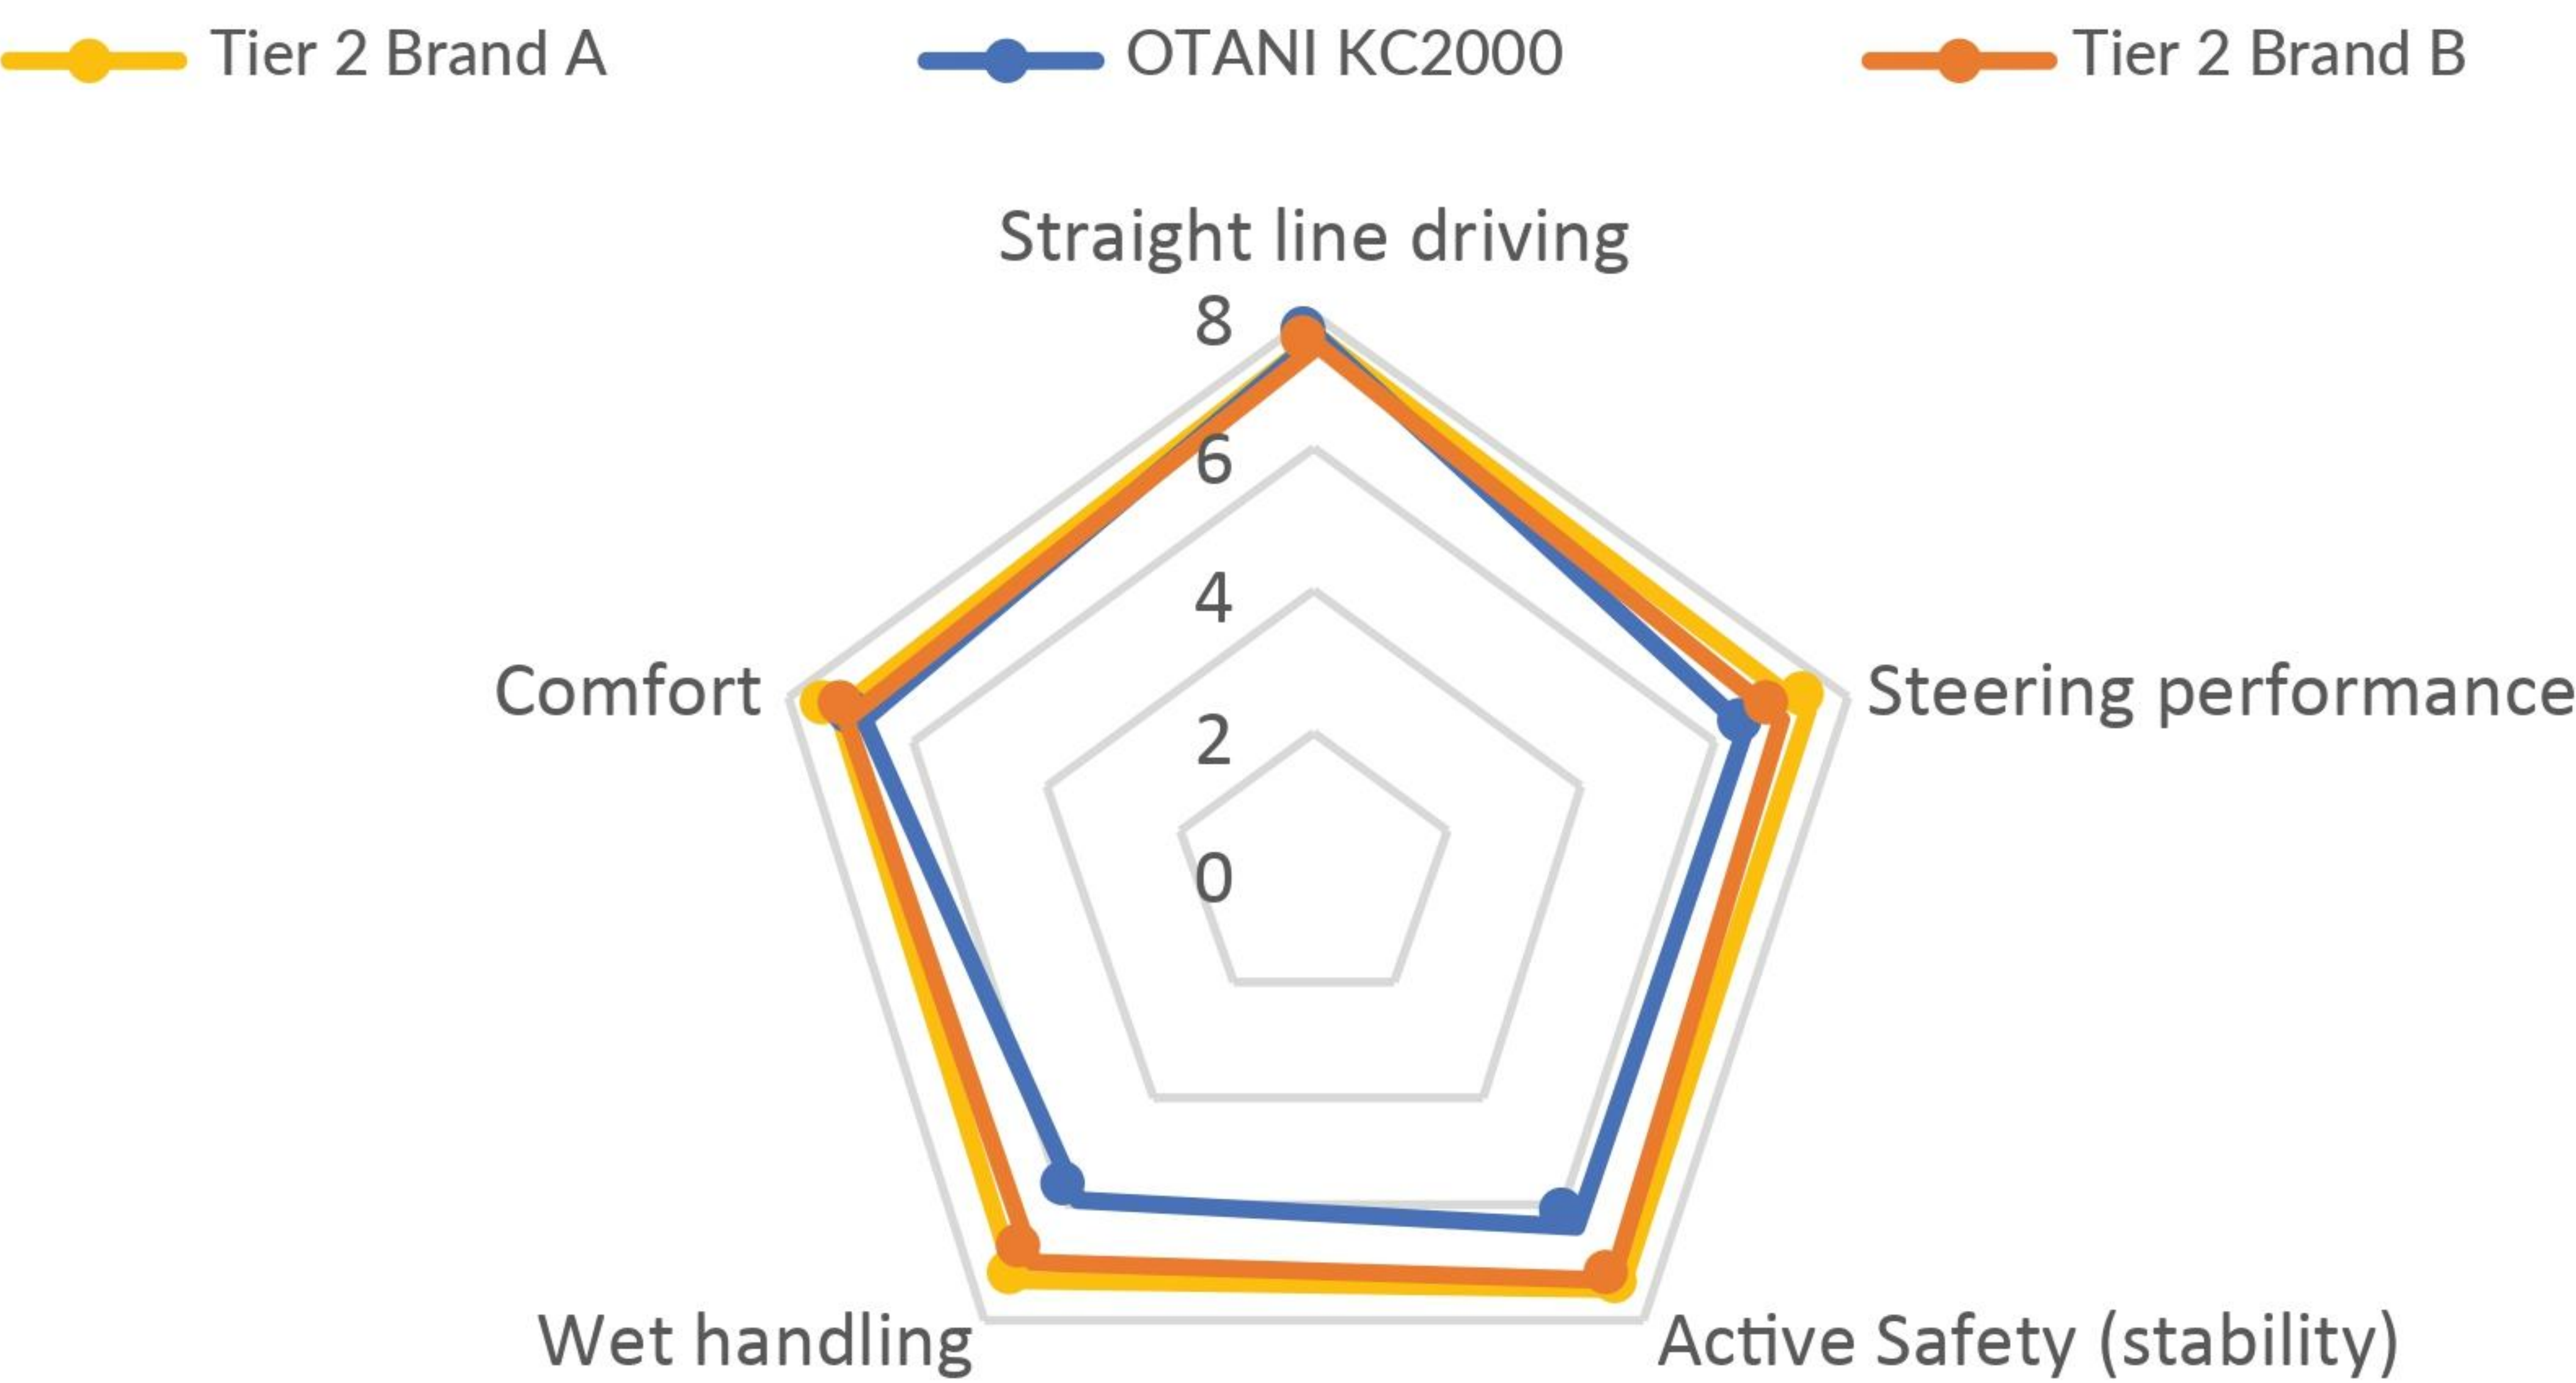


Internal Noise Overall

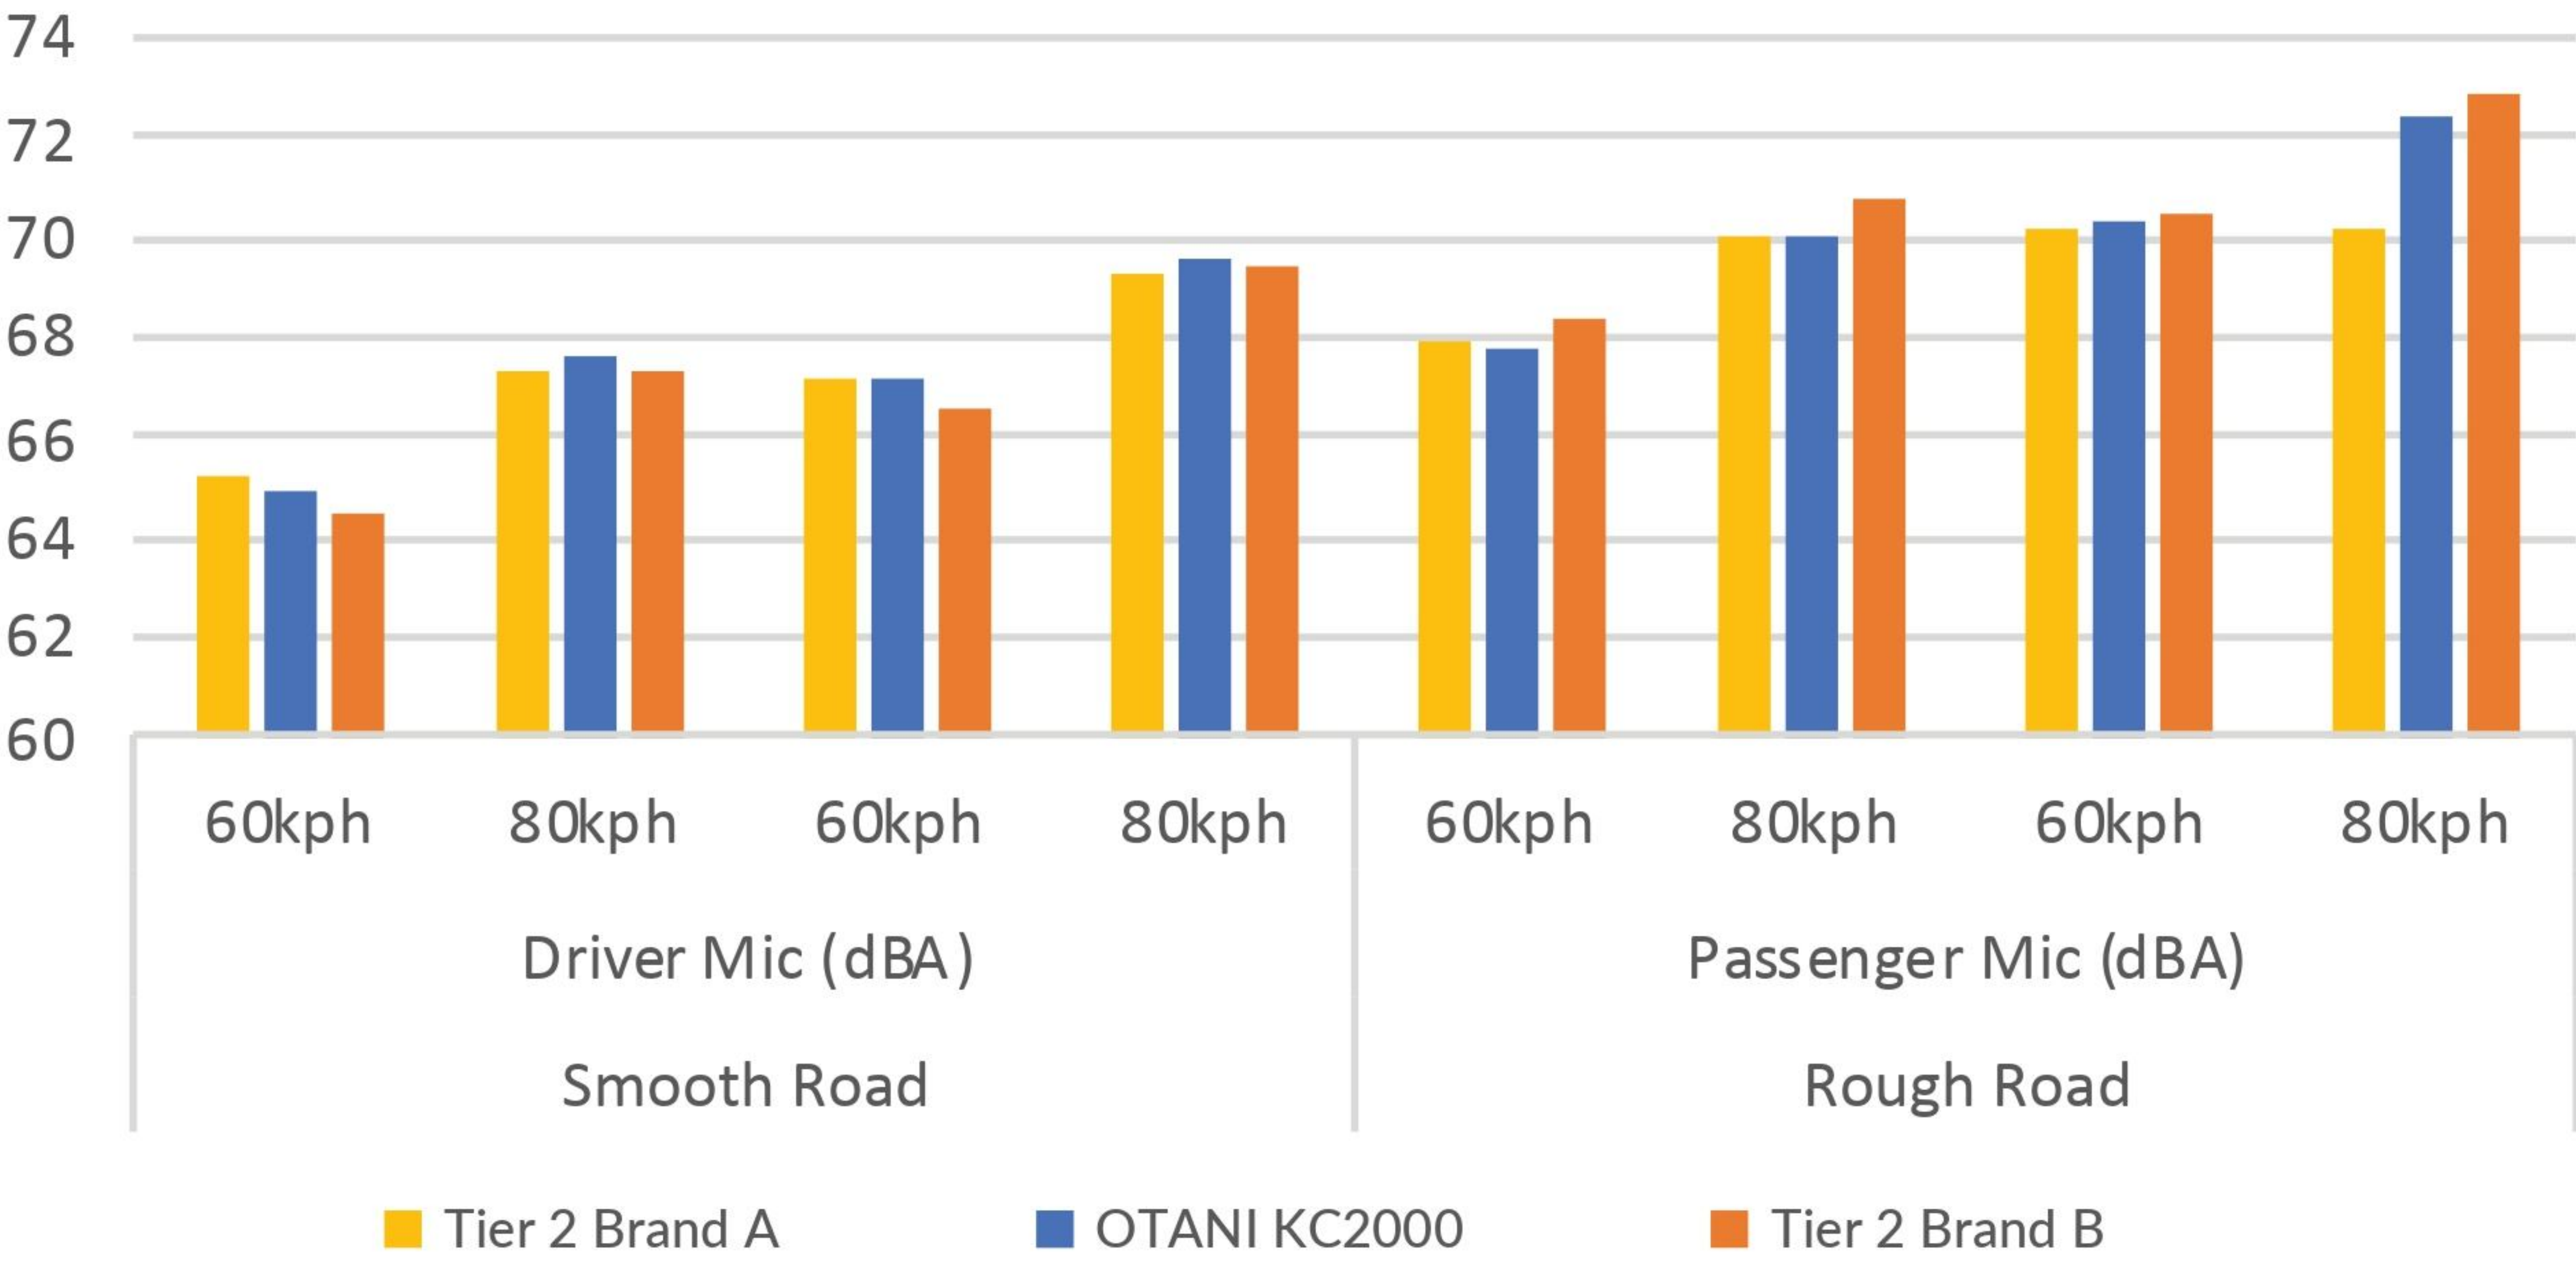



KC2000

For High-performance and Luxury Vehicles

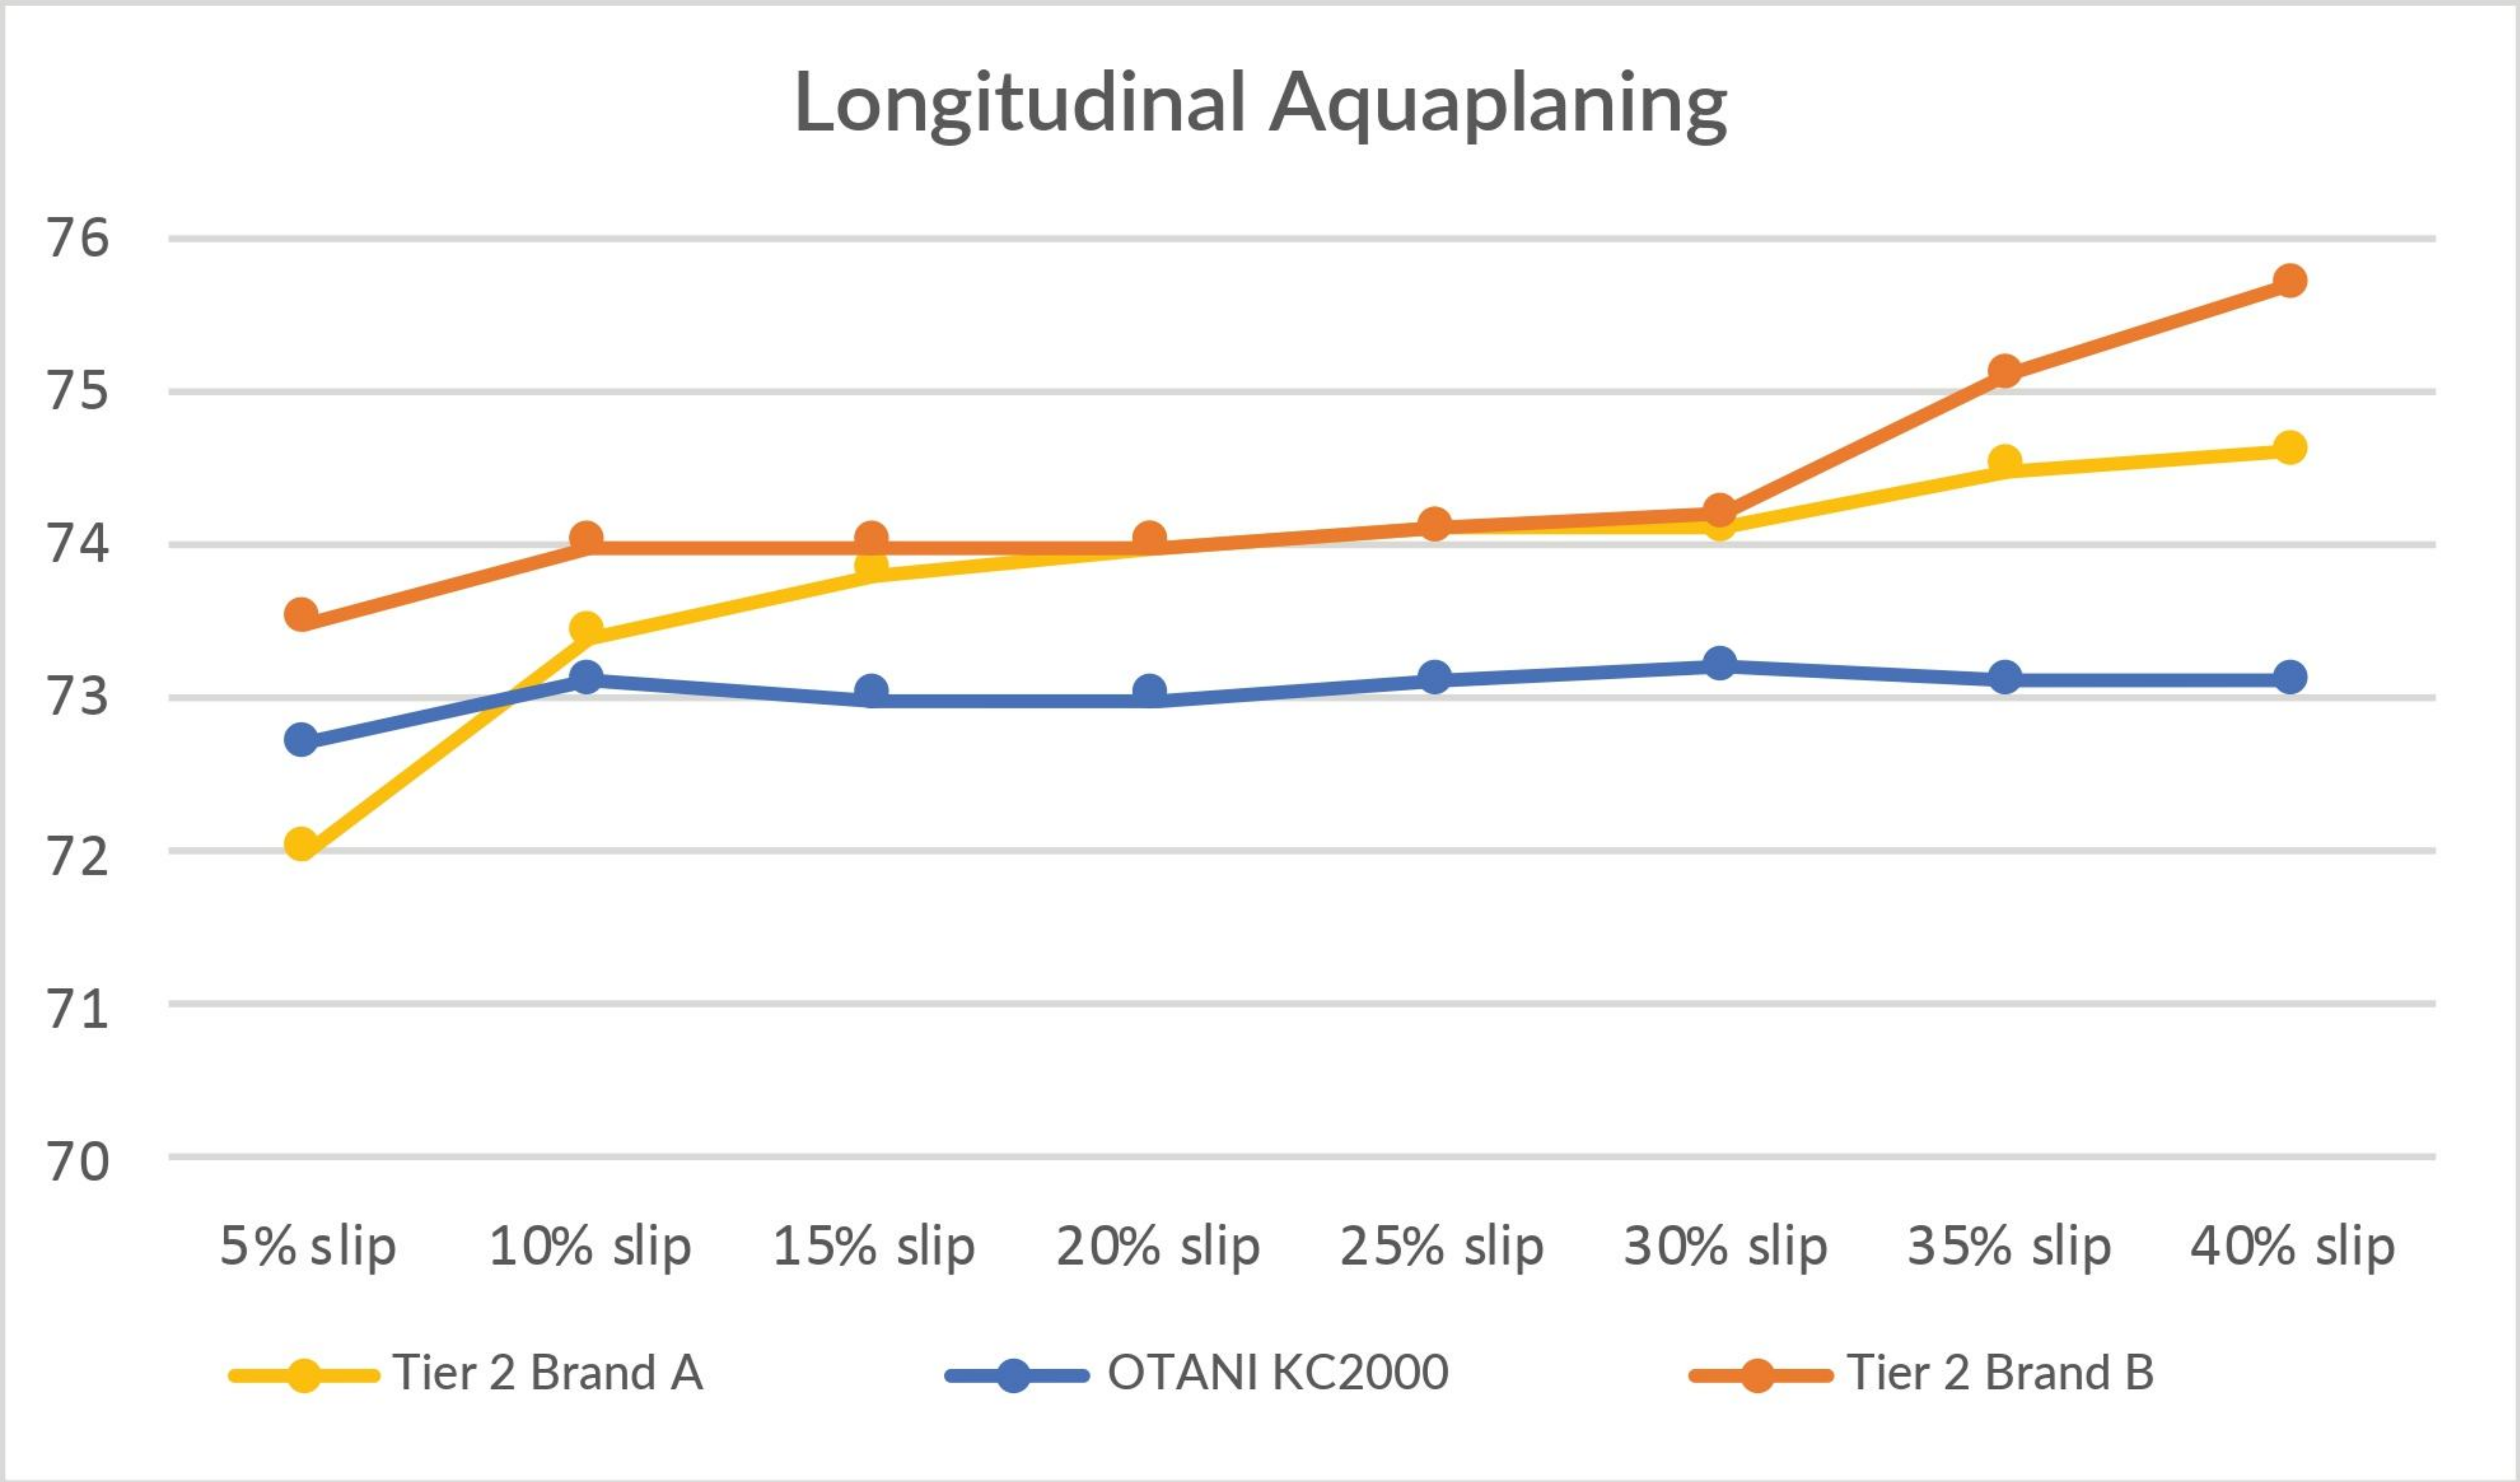


NEW

KN1000**For High-performance EV's**


KN1000



Optimized tread pattern ensures a comfortable and quiet driving experience through an optimized tread pattern, special polyurethane foam, and lower hysteresis compounds

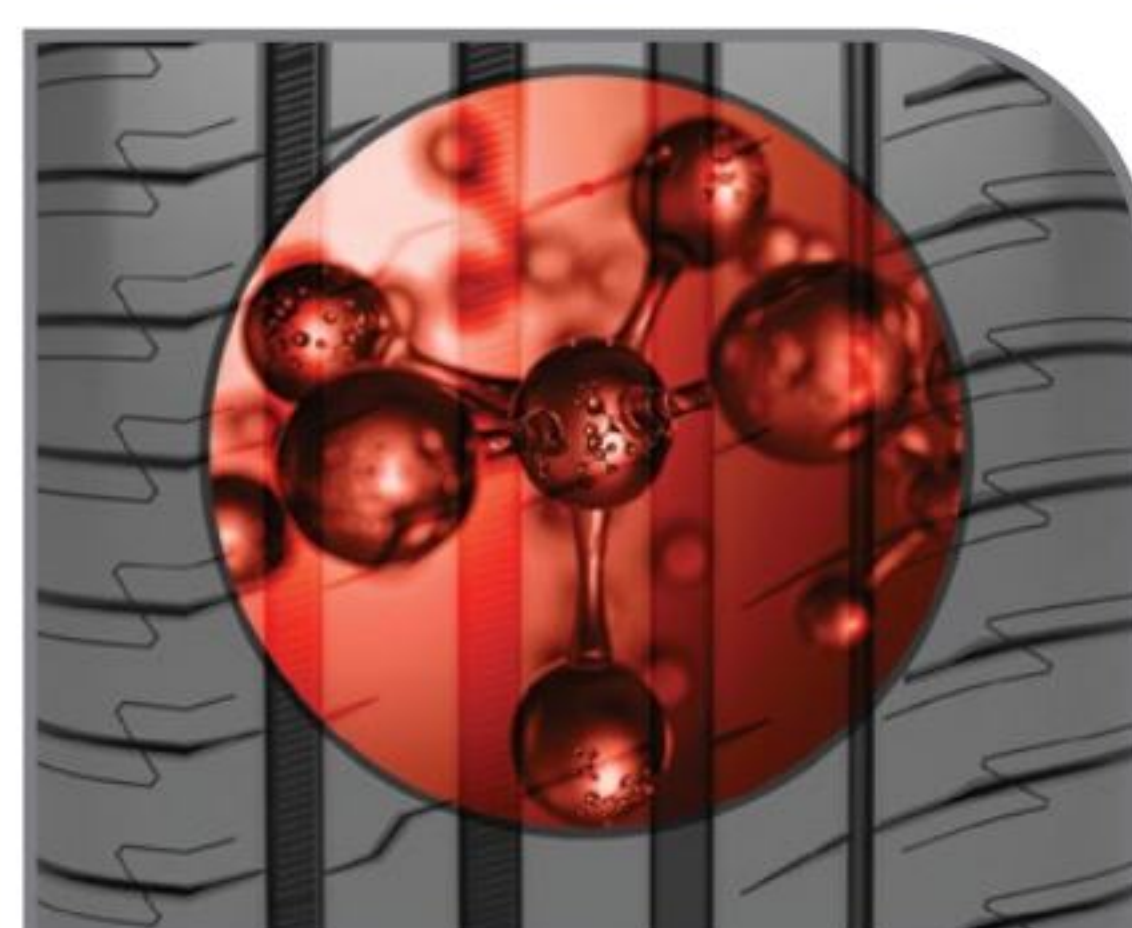

Innovative tread & sidewall compound offers excellent grip & handling performance, low energy consumption, and good durability due to its innovative tread compound, robust sidewall compound, and new bead design

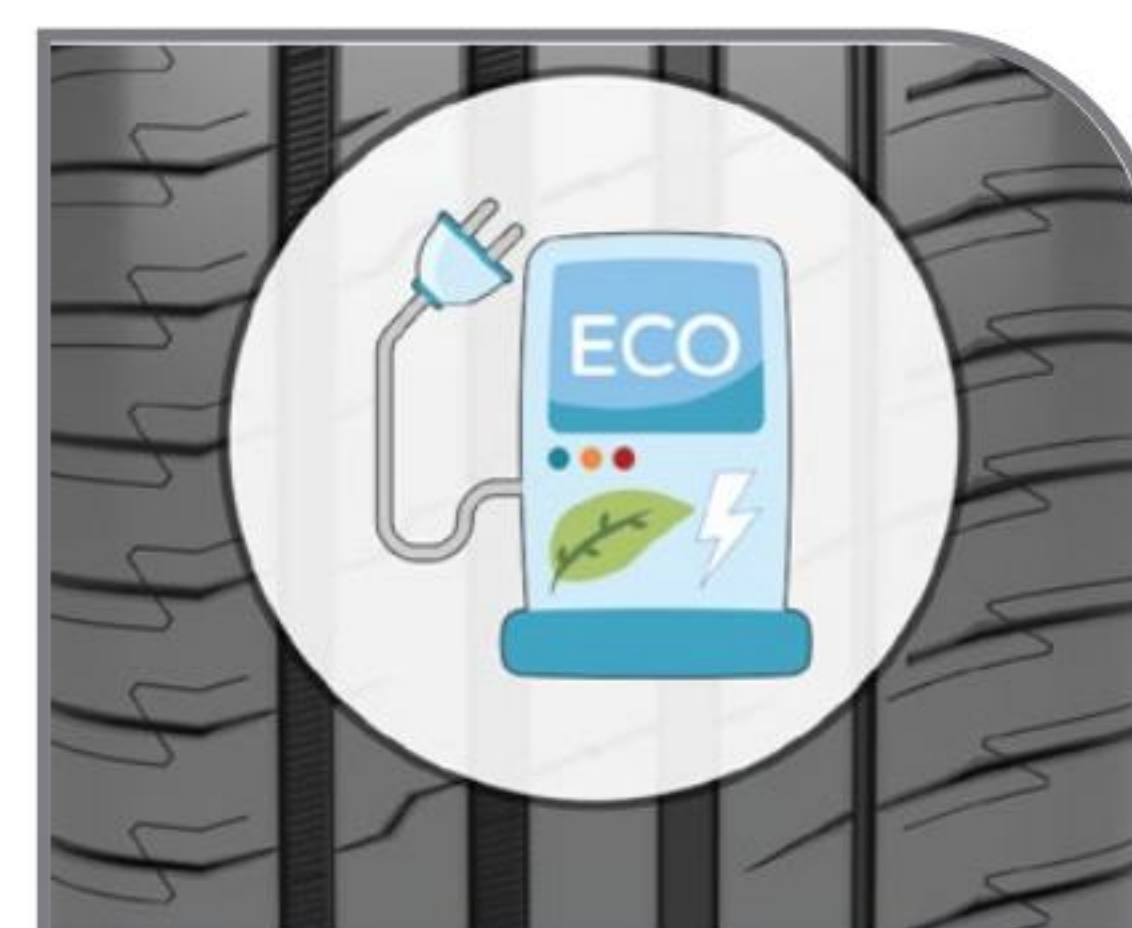

Lower energy consumption, improved structure provides lower rolling resistance, reducing energy consumption and extending battery life

Series	Size	Load & Speed Index		Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	psi	inches	mm	mm	mm
65 Series	275/65R18	116H	XL	1250	50	8.0	278	813	6.6
60 Series	195/60R16	93T	XL	650	50	6.0	197	637	6.8
	205/60R16	96V	XL	710	50	6.0	209	651	6.8
	215/60R16	99V	XL	775	50	6.5	222	661	6.6
	225/60R18	104V	XL	900	50	6.5	226	730	6.7
	235/60R18	107V	XL	975	50	7.0	237	740	6.7
	275/60R20	116H	XL	1250	50	8.0	269	836	6.7
55 Series	185/55R16	87V	XL	545	50	6.0	193	610	6.6
	215/55R17	98V	XL	750	50	7.0	225	670	7.3
	215/55R18	99V	XL	775	50	7.0	224	692	6.7
	225/55R19	103W	XL	875	50	7.0	230	734	6.7
	235/55R19	105V	XL	925	50	7.5	240	740	6.7
50 Series	205/50R17	93W	XL	650	50	6.5	209	639	7.0
	215/50R17	95W	XL	690	50	7.0	222	648	6.8
	215/50R18	96V	XL	710	50	7.0	222	673	6.7
	225/50R18	99V	XL	775	50	7.0	225	684	6.9
	215/50R19	97V	XL	730	50	7.0	220	700	6.8
	235/50R19	103V	XL	875	50	7.5	241	719	6.7
	255/50R19	107V	XL	975	50	8.0	259	738	6.7
	235/50R20	104V	XL	900	50	7.5	244	744	6.6
	245/50R20	105V	XL	925	50	7.5	248	755	6.6
	275/50R22	115V	XL	1215	50	8.5	282	833	6.8
45 Series	205/45R17	88W	XL	560	50	7.0	201	618	6.9
	235/45R18	98W	XL	750	50	8.0	235	672	6.7
	235/45R19	99W	XL	775	50	8.0	242	696	6.7
	245/45R19	102W	XL	850	50	8.0	238	703	6.7
	255/45R19	104Y	XL	900	50	8.5	251	710	6.7
	235/45R20	100W	XL	800	50	8.0	235	722	7.0
	245/45R20	103W	XL	875	50	8.0	243	727	6.6
	255/45R20	105Y	XL	925	50	8.5	255	735	6.7
	265/45R20	108W	XL	1000	50	9.0	267	745	6.6
	275/45R20	110W	XL	1060	50	9.0	274	753	6.5



NEW

KN1000

For High-performance EV's

Series	Size	Load & Speed Index		Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	psi	inches	mm	mm	mm
40 Series	235/40R19	96W	XL	710	50	8.5	241	670	6.8
	HL 245/40R19	101V	XL	825	50	8.5	249	679	6.7
	285/40R19	107W	XL	975	50	10.0	290	710	6.5
	245/40R20	99Y	XL	775	50	8.5	245	703	6.6
	HL 255/40R20	104Y	XL	900	50	9.0	259	711	6.9
	265/40R20	104W	XL	900	50	9.5	270	718	6.5
	HL 265/40R21	108H	XL	1000	50	9.5	269	744	6.6
	275/40R22	107W	XL	975	50	9.5	274	779	6.7
35 Series	HL 265/35R19	98Y	XL	750	50	9.5	265	666	6.6
	235/35R20	92Y	XL	630	50	8.5	238	673	6.7
	HL 245/35R21	99Y	XL	775	50	8.5	241	710	7.1
	HL 255/35R21	101Y	XL	825	50	9.0	262	712	6.7
	HL 265/35R21	103Y	XL	875	50	9.5	263	719	6.9
	HL 275/35R21	105Y	XL	925	50	9.5	271	725	6.9
	265/35R22	102Y	XL	850	50	9.5	269	754	6.7
	HL 285/35R22	109Y	XL	1030	50	10.0	284	758	6.6
30 Series	295/30R21	102Y	XL	850	50	10.5	294	711	6.5
	HL 305/30R21	107Y	XL	975	50	11.0	305	715	6.4



RK1000

For 4x4's on Highway Terrain


RK1000



Efficient tread design for water evacuation, braking distance and improved wet handling performance.



Various tread patterns reduce noise. makes driving comfortable and soft

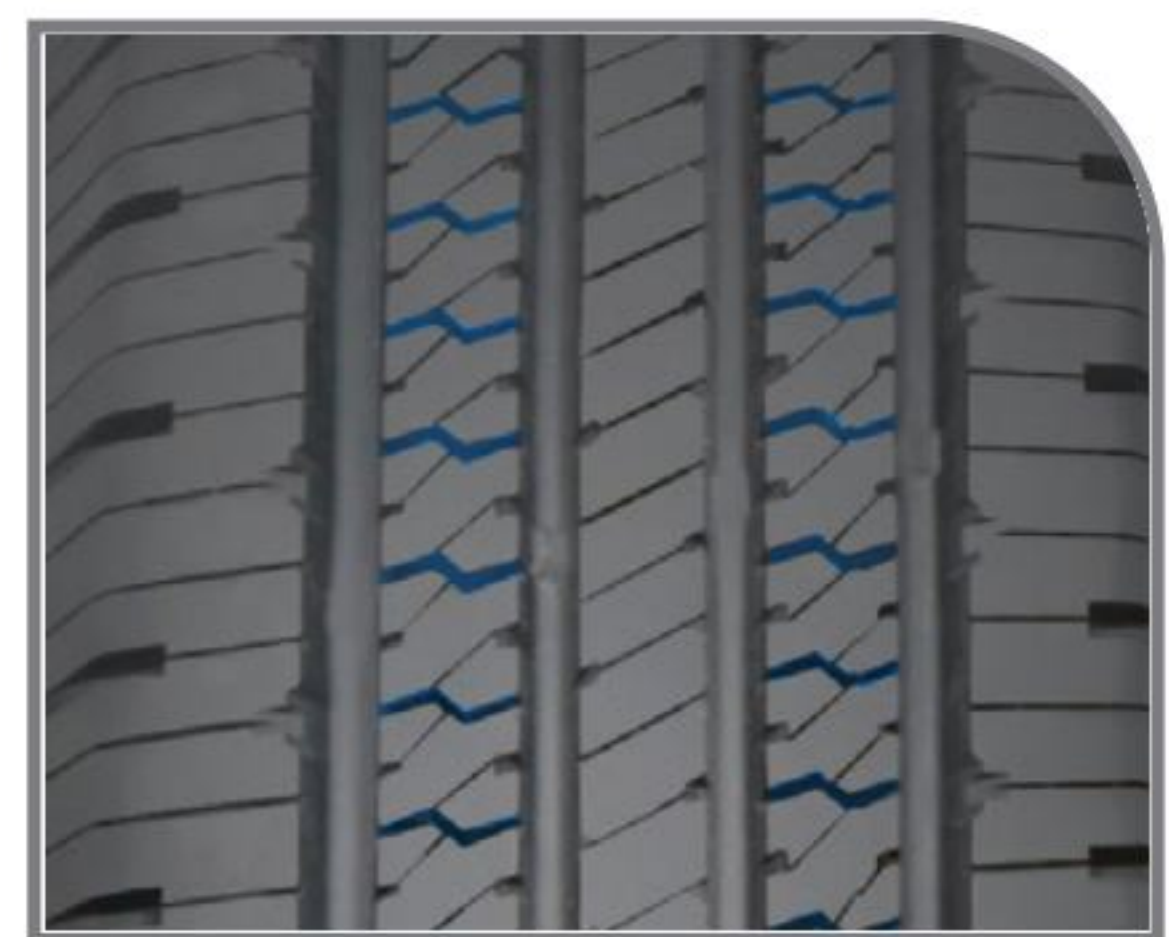

Efficiently improved tread formula contributes to longer life, traction and fuel efficiency.

Series	Size	PR	Load & Speed Index	Max Load (Single)	Max Load (Dual)	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	kgs	psi	inches	mm	mm	mm
85 Series	LT 215/85R16	10	115/112S	1215	1120	80	6.0	225	767	10.7
	LT 235/85R16	10	120/116S	1400	1250	80	6.5	245	802	10.7
80 Series	LT 235/80R17	10	120/117S	1400	1285	80	6.5	233	807	11.3
75 Series	LT 225/75R16	10	115/112S	1215	1120	80	6.0	220	740	10.8
	LT 245/75R16	10	120/116S	1400	1250	80	7.0	246	771	11.3
	LT 265/75R16	10	123/120S	1550	1400	80	7.5	268	800	11.6
	LT 245/75R17	10	121/118S	1450	1320	80	7.0	247	797	11.4
70 Series	LT 245/70R17	10	119/116S	1360	1250	80	7.0	245	775	11.5
	LT 265/70R17	10	121/118S	1450	1320	80	8.0	269	800	11.7
65 Series	LT 275/65R18	10	123/120S	1550	1400	80	8.0	275	816	11.8

SA1000

For 4x4's on Highway Terrain

SA1000



Specially engineered tread design that delivers stability, precise control and good handling.



Optimal pitch variation that leads to lower noise and greater ride comfort.



Uniquely shaped sipes on the tread gives better grip and stability in all weather conditions.

Series	Size	Load & Speed Index	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			kgs	psi	inches	mm	mm	mm
75 Series	235/75R15	109H XL	1030	50	6.5	236	730	8.6
	265/75R16	116T	1250	44	7.5	272	797	8.4
70 Series	205/70R16*	97H	730	44	6.0	214	694	8.6
	215/70R16	100H	800	44	6.5	226	706	8.5
	235/70R16	106H	950	44	7.0	246	737	8.5
	245/70R16	111H XL	1090	50	7.0	246	737	8.6
	255/70R16	111H	1090	44	7.5	260	761	7.5
	265/70R16	112H	1120	44	8.0	260	761	8.7
	245/70R17	110H	1060	44	7.0	249	777	8.4
	265/70R17	115H	1215	44	8.0	275	806	8.4
65 Series	225/65R17	106H XL	950	50	6.5	237	743	8.5
	235/65R17	104H	900	44	7.0	240	738	8.6
	245/65R17	111H XL	1090	50	7.0	240	738	8.6
	255/65R17	114H XL	1180	50	7.5	243	749	8.6
	265/65R17	116H XL	1250	50	8.0	276	773	7.8
	235/65R18*	106H	950	44	7.0	239	763	8.6
	255/65R18*	111T	1090	44	7.5	264	791	9.5
	265/65R18	112T	1120	44	8.0	268	797	9
	275/65R18	116H XL	1250	50	8.0	277	813	8.6
60 Series	235/60R16	100H	800	44	7.0	238	686	8.7
	215/60R17	96H	710	44	6.5	218	691	8.6
	235/60R17	102H	850	44	7.0	238	686	8.6
	235/60R18	107H XL	975	50	7.0	236	743	8.6
	245/60R18	105H	925	44	7.0	236	743	8.7
	255/60R18	112H XL	1120	50	7.5	244	748	8.6
	265/60R18	114H XL	1180	50	8.0	258	765	8.6
	255/60R19*	109H	1030	44	7.5	258	791	9
	275/60R20	115H	1215	44	8.0	279	838	9.7
55 Series	215/55R18*	95H	690	44	7.0	223	694	8.7
	225/55R18*	98H	750	44	7.0	229	707	9
	255/55R18*	109H XL	1030	50	8.0	266	738	7.9
	275/55R20	117H XL	1285	50	8.5	281	810	8.3
50 Series	255/50R19*	107H XL	975	50	8.0	255	742	8.6
	255/50R20*	109H XL	1030	50	8.0	253	772	9
	265/50R20	111H XL	1090	50	8.5	269	779	8.4
	275/50R22*	115T XL	1215	50	8.5	279	843	8.6

* Newly added sizes




SA1000

For 4x4's on Highway Terrain

Test Results

Subjective evaluation test (Ride & Handling)

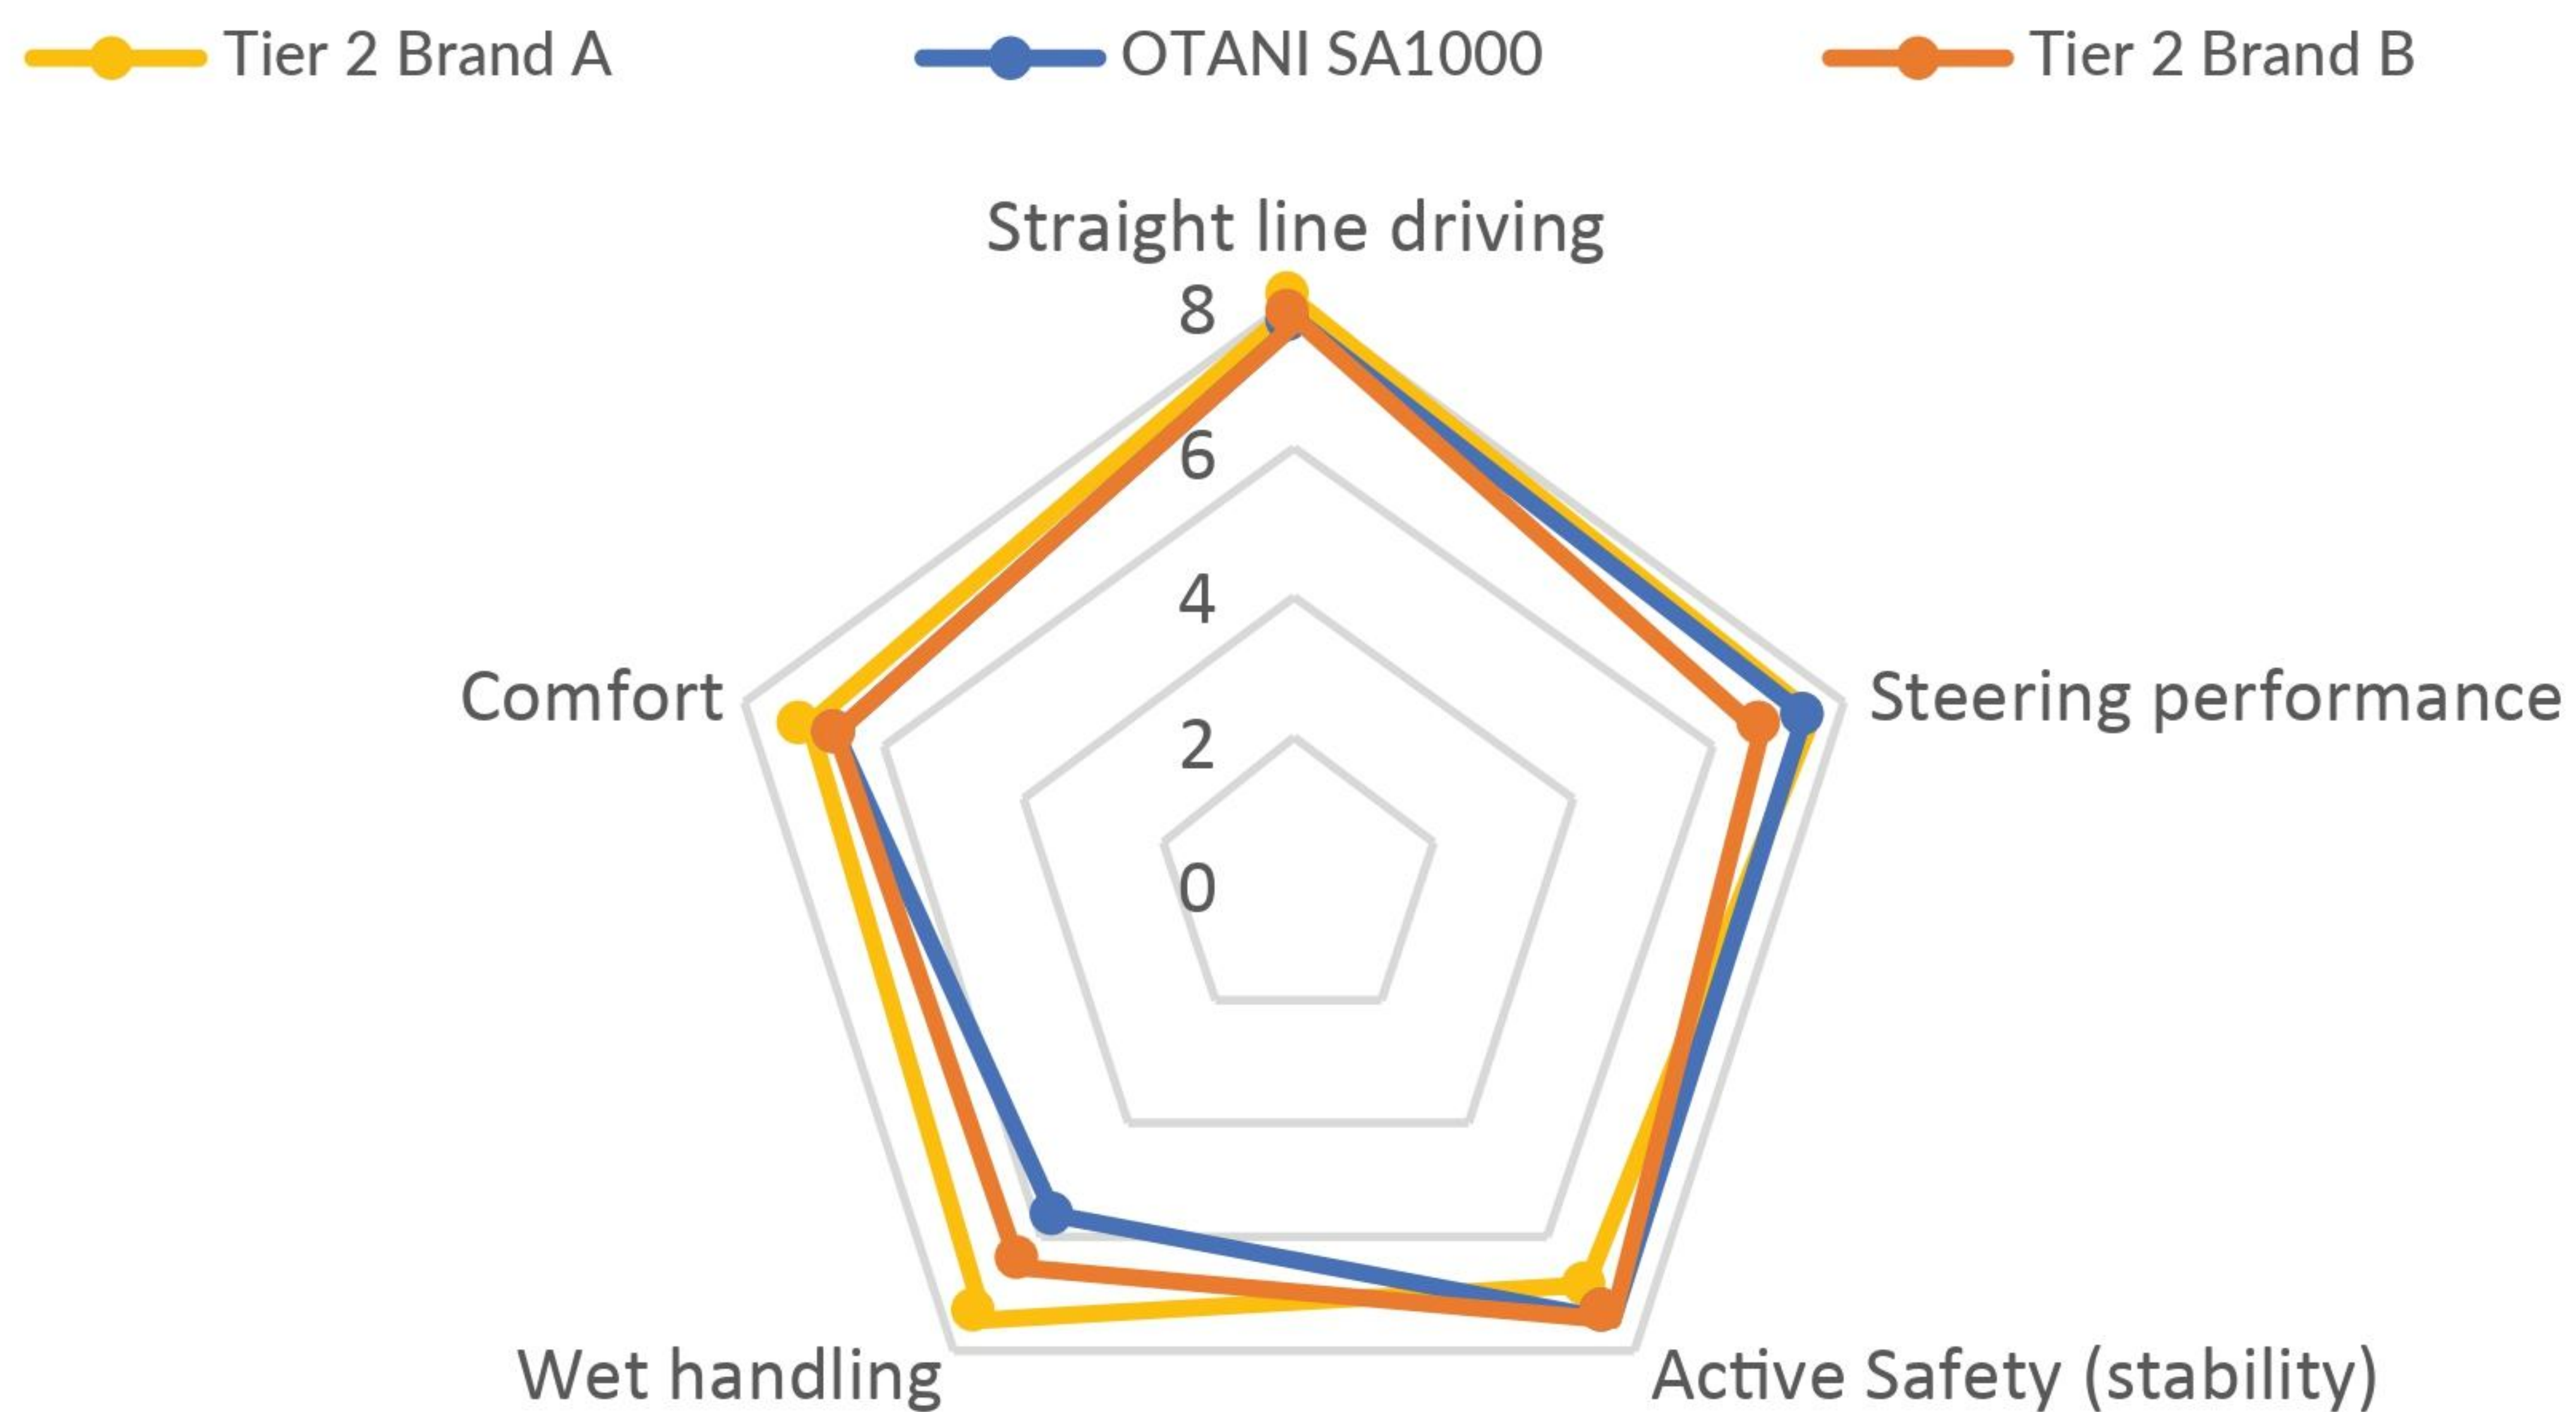

Internal Noise Overall



SA2000

For 4x4's on All Terrain

SA2000



Special sipe groove design to help with good road grip, and increase grip on the road in muddy conditions



The shoulder groove has a concave shape, to increase driving performance in muddy areas.



The design of the inner tube shoulder is embossed. Increase the rubber texture around the tread to have a thickness, to help prevent sidewall damage and increase the tugging force

Series	Size	PR	Load & Speed Index	Max Load (Single)	Max Load (Dual)	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	kgs	psi	inches	mm	mm	mm
75 Series	LT 265/75R16*	8	119/116Q	1360	1250	65	7.5	275	800	11.7
	LT 265/75R16	10	123/120R	1550	1400	80	7.5	275	800	11.7
	LT 285/75R16**	6	116/113Q	1250	1150	50	8.0	296	834	11.7
	265/75R16	-	116R	1250	-	44	7.5	264	800	12.0
70 Series	LT 245/70R16	8	113/110S	1150	1060	65	7.0	253	746	12.0
	LT 245/70R16*	10	118/115Q	1320	1215	80	7.0	253	746	12.0
	LT 255/70R16**	10	120/117Q	1400	1285	80	7.5	264	764	12.0
	LT 265/70R16*	10	121/118Q	1450	1320	80	8.0	279	774	12.0
	265/70R16	-	112S	1120	-	44	8.0	275	774	12.0
65 Series	LT 265/65R17*	10	120/117Q	1400	1285	80	8.0	274	774	12.0
	265/65R17	-	116S	1250	-	50	8.0	272	776	10.0
	LT 265/65R18	8	117/114Q	1285	1180	65	8.0	272	801	12.0
	LT 285/65R18*	8	121/118Q	1450	1320	65	8.5	296	825	12.1
	LT 285/65R18	10	125/122R	1650	1500	80	8.5	296	825	12.1
60 Series	LT 265/60R18*	10	119/116Q	1360	1250	80	8.0	272	775	12.0
	265/60R18	-	110S	1060	-	44	8.0	272	775	10.0
55 Series	LT 275/55R20	10	120/117S	1400	1285	80	8.5	271	773	12.0
50 Series	265/50R20	-	111S XL	1090	-	50	8.5	276	776	7.8


* Available in BSW & WSW sidewall styles

**Available in BSW & RWL sidewall styles

SA2100

For 4x4's on All Terrain

SA2100

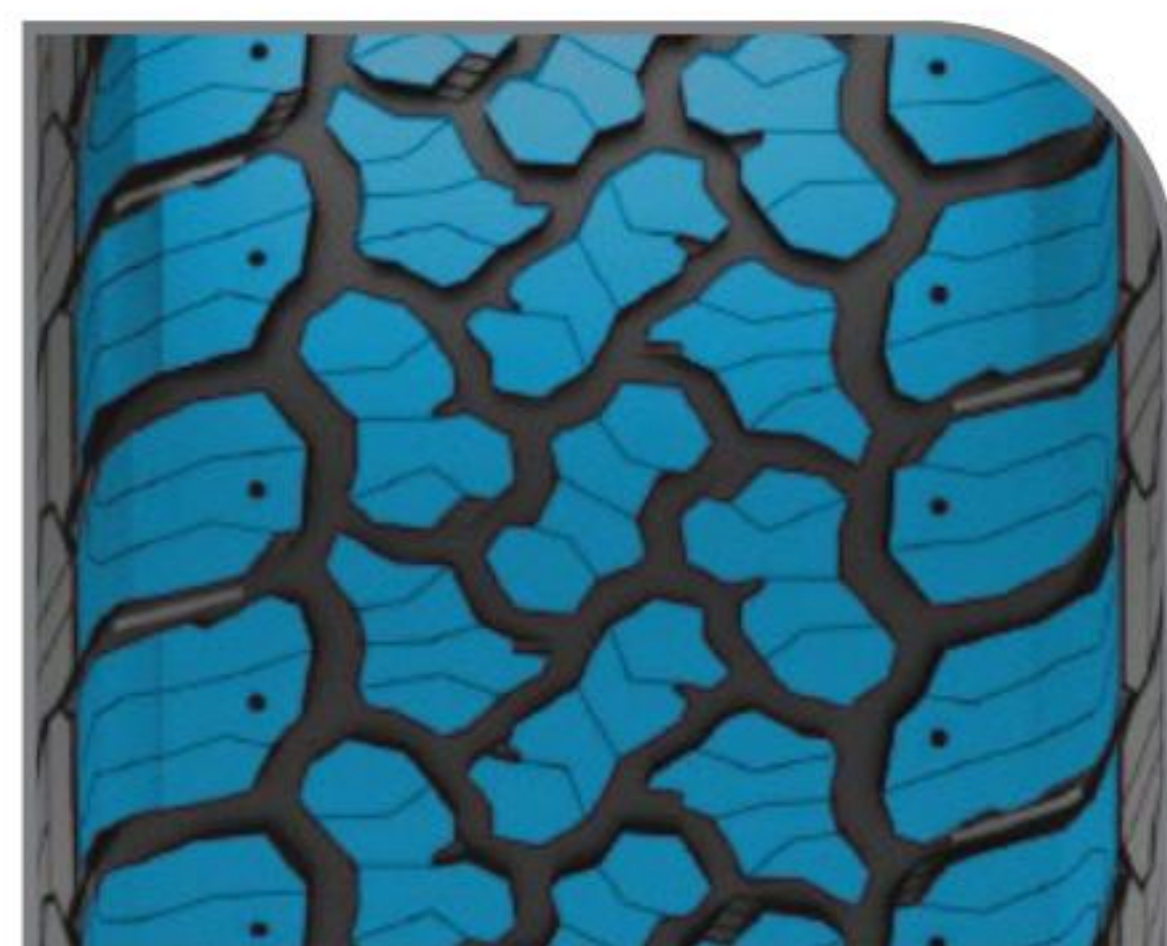

Optimized tread blocks with special sipes design & studded tread holes for excellent stability, traction, low noise and even wear over the long haul



Stronger shoulder block design with angled shoulder scallops and stone ejectors to resist tearing from maneuver on on/off road conditions and provide stability on mud and snow conditions



Reinforced top sidewall with increased rubber thickness and special rubber formula to protect critical sidewall failure zone and to improve the tear resistance and high mileage


Series	Size	PR	Load & Speed Index	Max Load (Single)	Max Load (Dual)	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	kgs	psi	inches	mm	mm	mm
Flotation	LT 31X10.50R15	6	109S	1030	-	50	8.5	268	773	12.3
	LT 31X10.50R15*	6	109Q	1030	-	50	8.5	268	773	12.3
	LT 33X12.50R17*	10	120Q	1400	-	65	10.0	320	825	14.5
	LT 35X12.50R17*	10	121Q	1450	-	65	10.0	333	876	14.4
	LT 33X12.50R18*	10	118Q	1320	-	65	10.0	316	825	14.4
	LT 35X12.50R18*	8	118Q	1320	-	50	10.0	316	825	14.4
	LT 35X12.50R18	10	123Q	1550	-	65	10.0	325	875	14.3
	LT 33X12.50R20*	12	119Q	1360	-	80	10.0	312	826	15.0
	LT 35X12.50R20*	10	121Q	1450	-	65	10.0	316	876	14.5
	LT 35X12.50R20	12	125Q	1650	-	80	10.0	316	876	14.5
70 Series	265/70R15	-	116T XL	1250	-	50	8.0	273	749	10.0
	265/70R17	-	116T XL	1250	-	50	8.0	276	805	9.1
	LT 285/70R17	10	121/118S	1450	1320	80	8.5	293	831	12.1
	LT 275/70R18	10	125/122S	1650	1500	80	8.0	272	843	12.9
65 Series	LT 275/65R18	10	123/120S	1550	1400	80	8.0	270	815	13.2
	LT 275/65R20	10	126/123S	1700	1550	80	8.0	277	867	13.0
60 Series	275/60R20	-	116T XL	1250	-	50	8.0	272	838	9.1
	LT 285/60R20	10	125/122S	1650	1500	80	8.5	289	848	12.2
55 Series	275/55R20	-	117T XL	1285	-	50	8.5	279	811	9.2
	LT 285/55R20	10	122/119S	1500	1360	80	9.0	289	823	12.3

* Available in BSW & WSW sidewall styles

SA3000

For 4x4's on All Terrain

SA3000

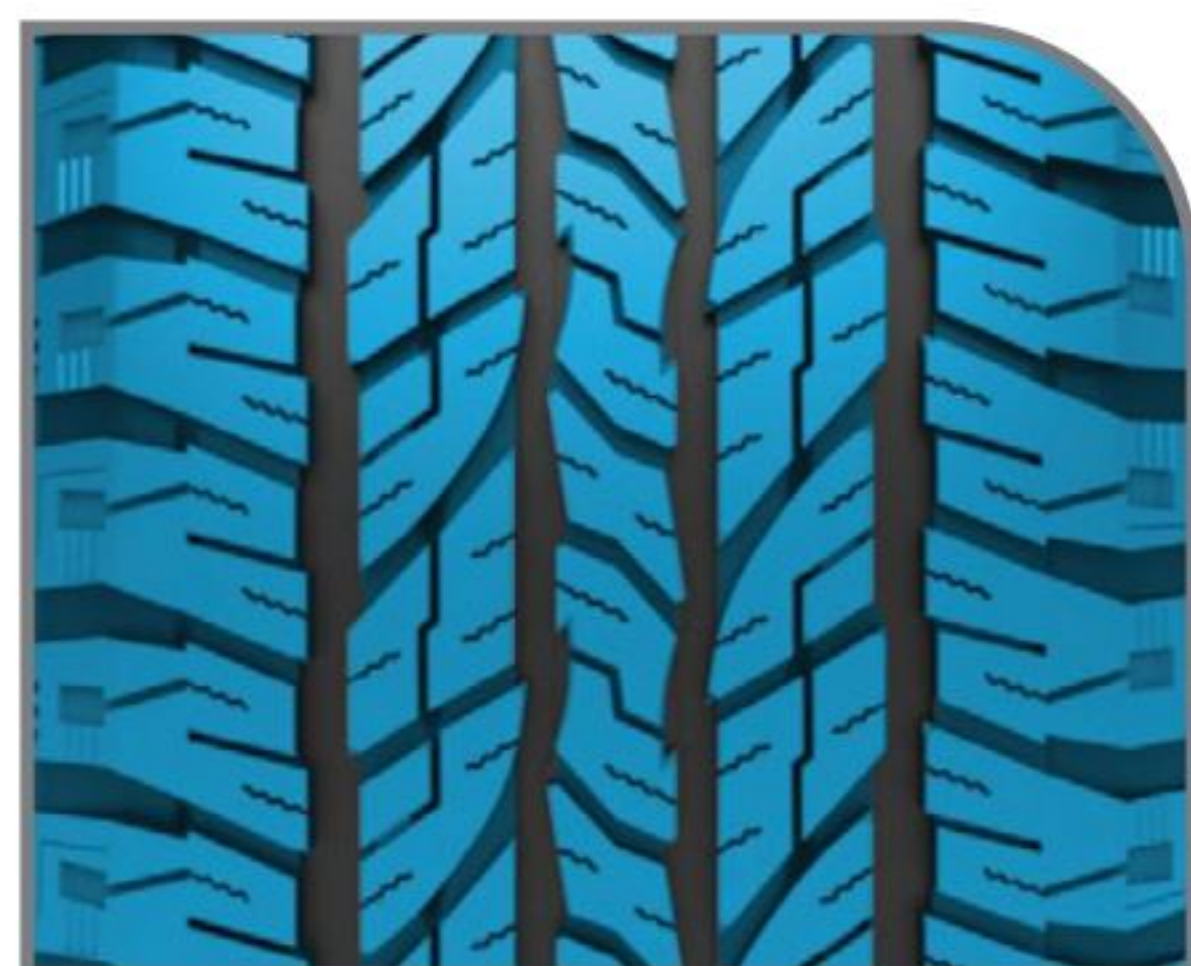

Aggressive tread block design that matches all kinds of road terrains and deliver enhanced stability.



3D sipes leading to outstanding braking performance on wet conditions and delivers enhanced ride comfort.



Continuous open lateral channels increase tire grip under skidding conditions and provide enhanced safety.

Series	Size	Load & Speed Index	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			kgs	psi	inches	mm	mm	mm
75 Series	235/75R15	109T XL	1030	50	6.5	239	728	9.5
	265/75R16	116S XL	1250	50	7.5	268	801	9.4
70 Series	225/70R15	100T	800	44	6.5	230	693	9.5
	235/70R15	106T XL	950	50	7.0	242	710	9.5
	255/70R15	108T	1000	44	7.5	258	734	9.4
	235/70R16	109T XL	1030	50	7.0	246	735	9.7
	245/70R16	111T XL	1090	50	7.0	248	747	9.5
	265/70R16	112T	1120	44	8.0	264	775	9.6
65 Series	265/65R17	112T	1120	44	8.0	272	775	9.5
	255/65R18*	111T	1090	44	7.5	264	791	9.5
	275/65R18	116T XL	1250	50	8.0	272	812	9.6
60 Series	265/60R18	114T XL	1180	50	8.0	268	776	9.6
55 Series	255/55R20*	110T XL	1060	50	8.0	264	789	9.6
	275/55R20	117T XL	1285	50	8.5	276	810	9.8
50 Series	265/50R20	111S XL	1090	50	8.5	268	783	9.5

All are available in BSW & OWL sidewall styles

* Newly added sizes




SA4000

For 4x4's on Mud Terrain


SA4000



Optimized tread block design with open shoulders and raised bars in between
For excellent traction and releasing compacted mud on all muddy roads

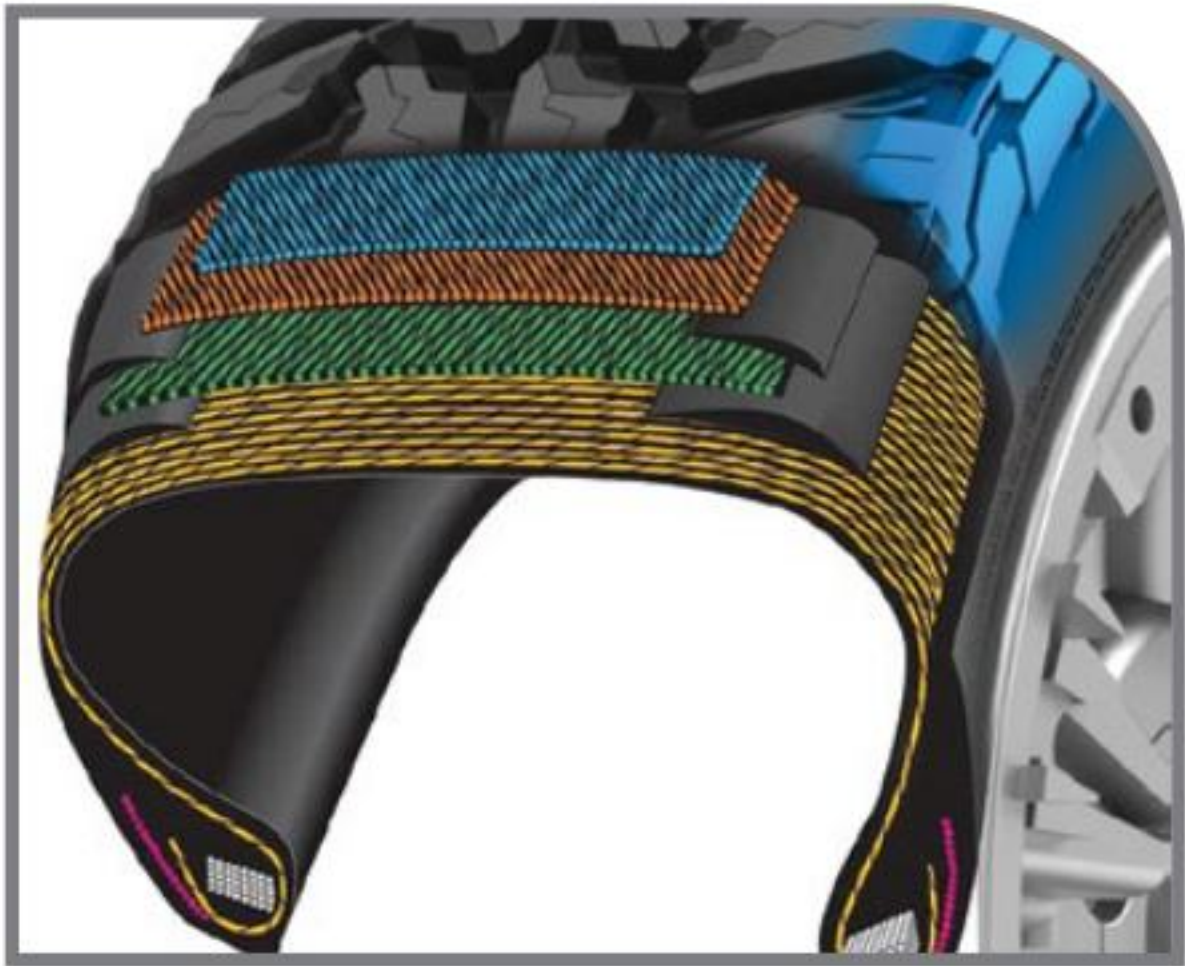

Stronger casing for aggressive usage conditions
With reinforced top-sidewall and 3-ply construction to protect critical sidewall failure zone

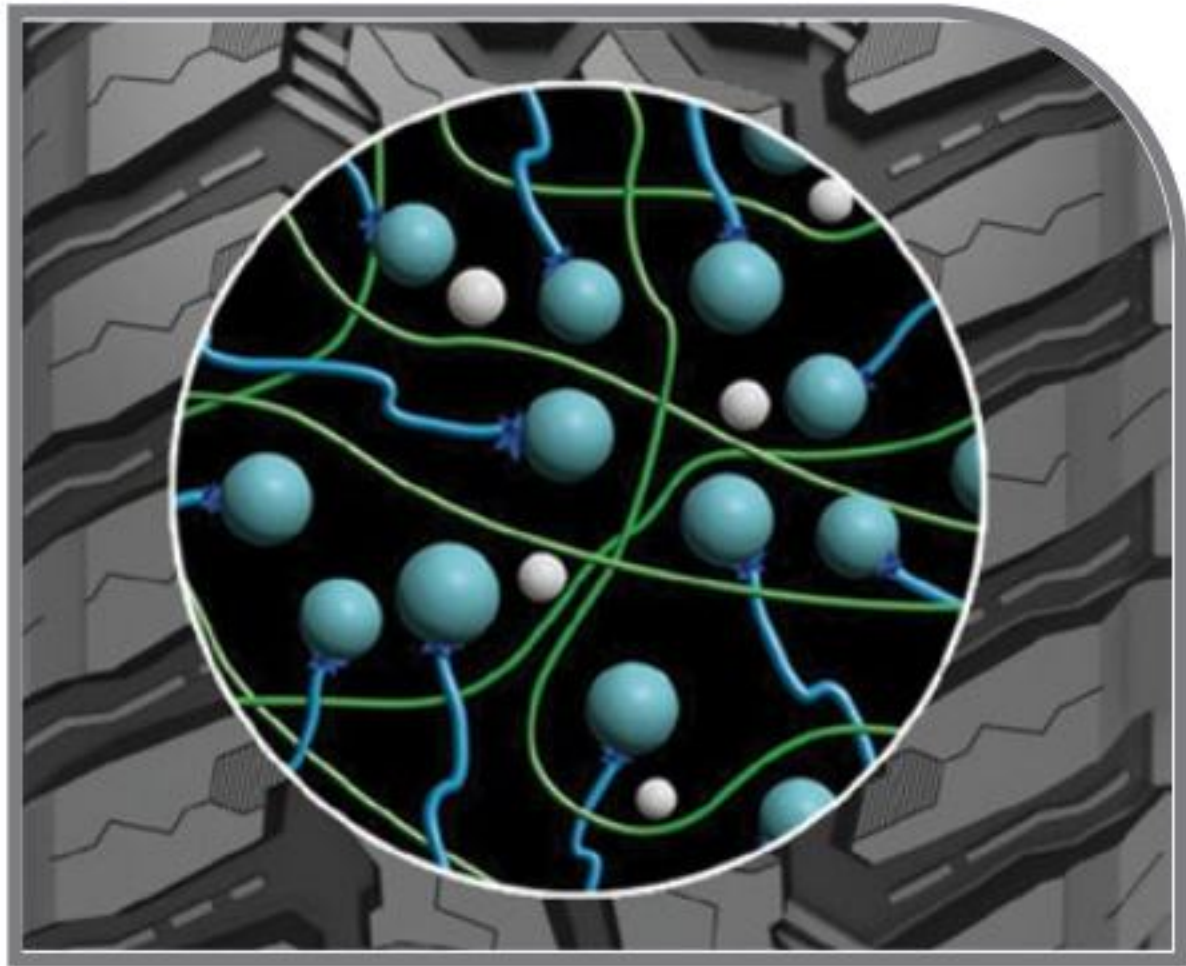

Cut & chip resistance tread rubber compound
Resists off-road abuse even in aggressive driving on rocky and mud terrains

Series	Size	PR	Load & Speed Index	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	psi	inches	mm	mm	mm
Flotation	LT 33X12.50R20	10	114Q	1180	65	10.0	318	827	14.0
	LT 33X12.50R20	12	119Q	1360	80	10.0	318	827	14.0
	LT 35X12.50R20*	10	121Q	1450	65	10.0	320	874	14.5
	LT 35X12.50R20	12	125Q	1650	80	10.0	322	874	14.0

* Available in BSW & RWL sidewall styles

SA5000

For 4x4's on Mud Terrain


SA5000



Optimized tread block design with open shoulders and raised bars in between for excellent traction and releasing compacted mud on all muddy roads



Stronger casing for aggressive usage conditions with reinforced top-sidewall and 3-ply construction to protect critical sidewall failure zone

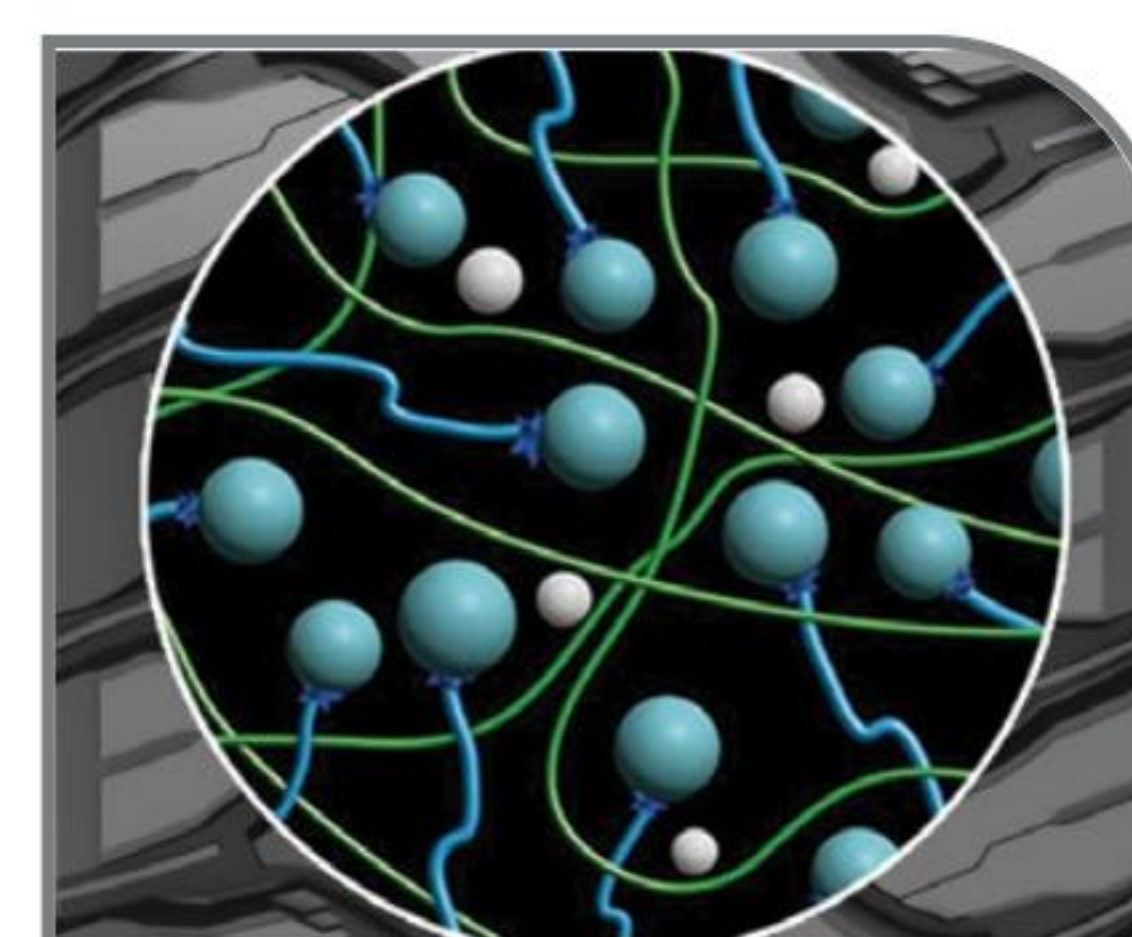

Cut & chip resistance tread rubber compound for aggressive usage conditions with tearing resistance compound

Series	Size	PR	Load & Speed Index	Max Load (Single)	Max Load (Dual)	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	kgs	psi	inches	mm	mm	mm
Flotation	LT 33X12.50R20	10	114Q	1180	-	65	10.0	317	825	13.5
70 Series	LT 265/70R16	10	121/118Q	1450	1320	80	8.0	278	778	13.3
65 Series	LT265/65R17	10	120/117Q	1400	1285	80	8.0	272	776	13.0
60 Series	LT265/60R18	10	119/116Q	1360	1250	80	8.0	267	775	13.0
55 Series	LT275/55R20	10	120/117Q	1400	1285	80	8.5	278	810	12.9
50 Series	LT265/50R20	10	115/112Q	1215	1120	80	8.5	277	774	13.2

All sizes available in BSW & WSW sidewall styles



BM1000

For Crossovers and Sports Utility Vehicles


BM1000



Wide circumferential groove for firm grip & to reduce hydroplaning.



Large Outer Tread Block to increase the tread footprint for better handling on cornering.

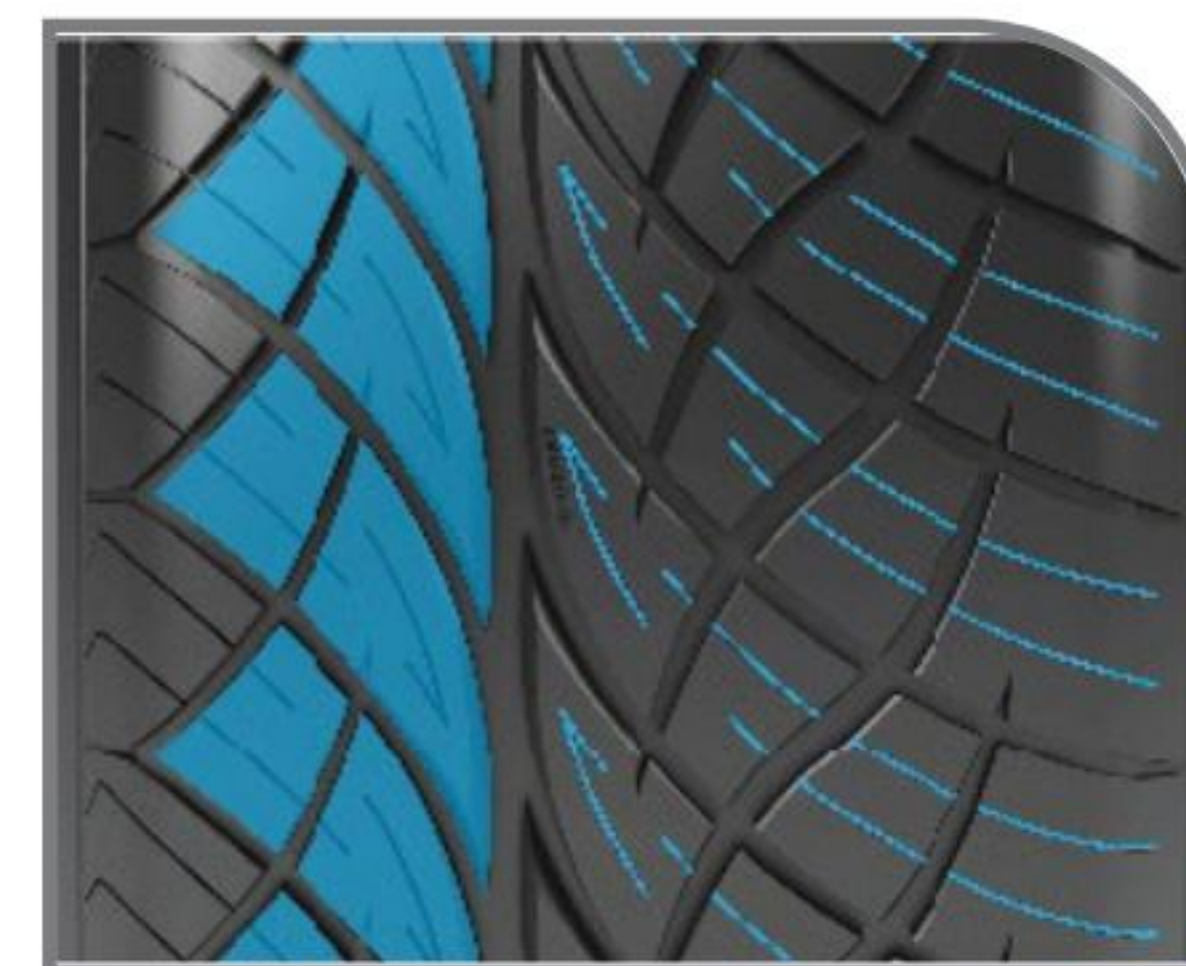

Small inner tread blocks & various sipes on tread to achieve shorter braking distance & to enhance vehicle stability.


Series	Size	Load & Speed Index	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			kgs	psi	inches	mm	mm	mm
65 Series	265/65R17	116V XL	1250	50	8.0	276	773	7.8
60 Series	225/60R18	104V XL	900	50	6.5	233	725	8.0
	265/60R18	114V XL	1180	50	8.0	277	774	7.8
55 Series	235/55R18	104V XL	900	50	7.5	241	717	7.4
	255/55R18	109V XL	1030	50	8.0	266	738	7.9
50 Series	255/50R18	106V XL	950	50	8.0	263	714	7.8
	265/50R20	111V XL	1090	50	8.5	276	776	7.8
45 Series	235/45R18	98V XL	750	50	8.0	236	668	7.8
	245/45R18	100V XL	800	50	8.0	242	677	7.8
	255/45R18	103V XL	875	50	8.5	252	686	7.7
40 Series	235/40R18	95V XL	690	50	8.5	242	647	7.8
	245/40R18	97V XL	730	50	8.5	245	657	7.3
	275/40R18	103V XL	875	50	9.5	276	678	7.7
35 Series	265/35R18	97V XL	730	50	9.5	268	642	7.8



BM2000

For Race/Tuning

BM2000

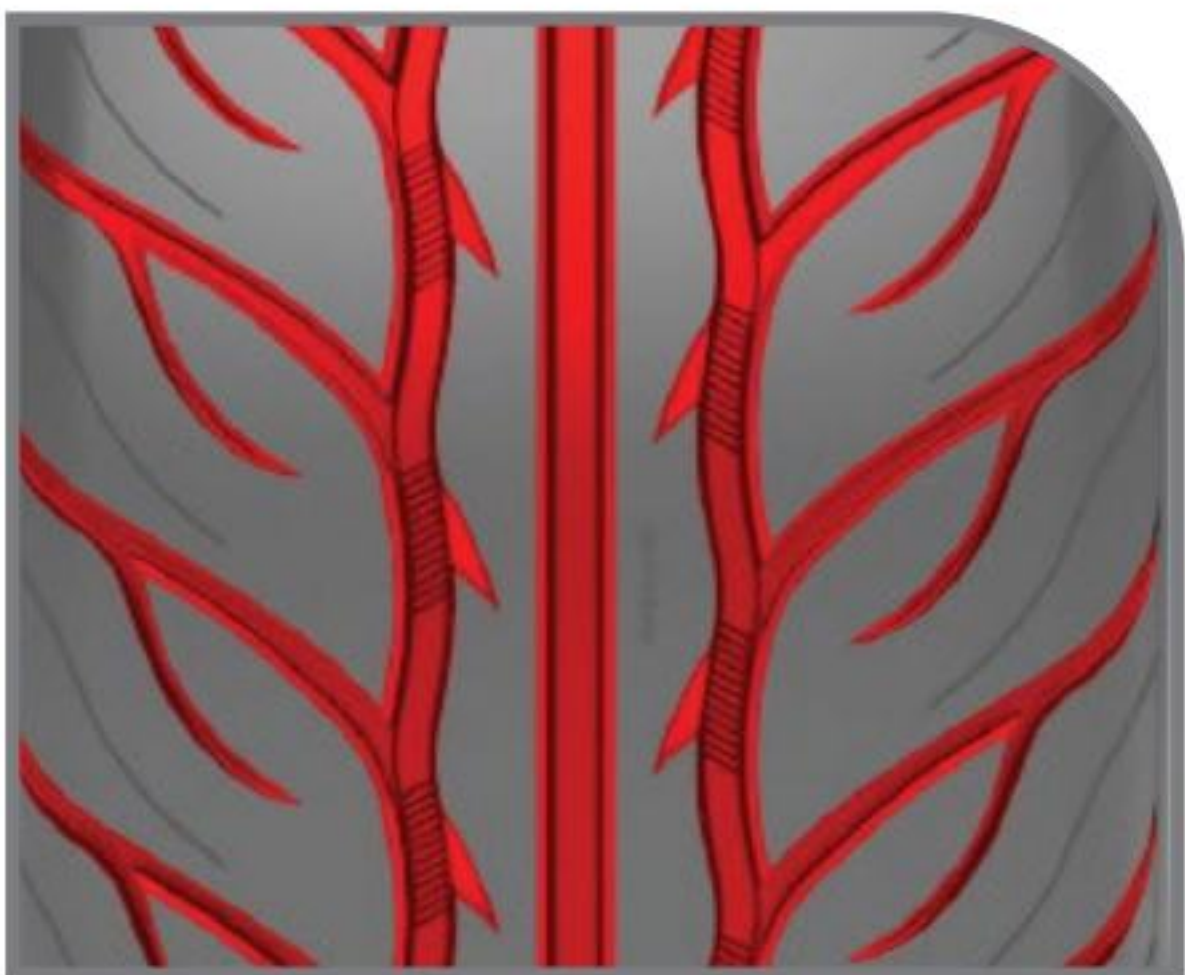

Optimized grooves design provides hydroplaning resistance and offers shorter braking distance.



Extra high performance rubber compound provides superior grip on dry and wet roads. High stiffness casing with rim guard construction helps in sharp steering response.



Massive shoulder ribs and wider tread design provides outstanding cornering grip thereby shortening the lap times.

Series	Size	Load & Speed Index	Maximum Load	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
			kgs	psi	inches	mm	mm	mm
60 Series	265/60R18	114V XL	1180	50	8.0	283	787	8.0
55 Series	195/55R15	85V	515	44	6.0	201	595	7.4
	255/55R18	109V XL	1030	50	8.0	266	749	7.9
50 Series	195/50R15	82V	475	44	6.0	201	577	7.4
	255/50R18	106V XL	950	50	8.0	276	723	8.0
45 Series	215/45ZR17	91W XL	615	50	7.0	222	634	7.4
	225/45ZR17	91W	615	44	7.5	228	636	7.0
	245/45ZR18	96W	710	44	8.0	243	677	8.1
40 Series	235/40ZR17	90W	600	44	8.5	243	617	8.0
	245/40ZR17	95W XL	690	50	8.5	250	627	8.0
	255/40ZR17	98W XL	750	50	9.0	256	637	8.0
	225/40ZR18	88W	560	44	8.0	231	640	7.0
	235/40ZR18	91W	615	44	8.5	244	644	8.0
	275/40ZR18	103W XL	875	50	9.5	289	685	7.9
35 Series	255/35ZR18	94W XL	670	50	9.0	254	637	8.0
	265/35ZR18	93W	650	44	9.5	272	643	8.0
	285/35ZR18	101W XL	825	50	10.0	281	658	8.0





MK1000

For Pick-up Trucks and Transport Vehicles

MK1000



Robust tread design that enhances durability and load carrying capacity.



Reinforced casing offers high endurance needed in commercial transportation.



Large tread blocks help in delivering superior traction in all road conditions.

Series	Size	PR	Load & Speed Index	Max Load (Single)	Max Load (Dual)	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	kgs	psi	inches	mm	mm	mm
LTRC	185R14C	8	102/100Q	850	800	65	5.5	194	646	8.2
	195R14C	8	106/104Q	950	900	65	5.5	203	669	8.5
	205R14C	8	109/107Q	1030	975	65	6.0	212	680	8.3
	195R15C	8	108/106S	1000	950	68	5.5	204	691	8.4
75 Series	205/75R14C*	8	109/107Q	1030	975	68	5.5	206	661	8.4
	225/75R14C	8	115/113P	1215	1150	68	6.0	231	699	8.5
	225/75R15C	8	116/114Q	1250	1180	68	6.0	231	725	8.5

* Available in BSW & WSW sidewall styles





MK2000

For Vans and Transport Vehicles

MK2000



Square shoulders ensure optimal foot print thereby enhancing stability.



Symmetrical tread design prevents heat buildup and wider grooves ensure easier water drainage.



Reinforced casing offers high endurance needed in commercial transportation.

Series	Size	PR	Load & Speed Index	Max Load (Single)	Max Load (Dual)	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	kgs	psi	inches	mm	mm	mm
LTRC	205R16C	8	110/108S	1060	1000	65	6.0	212	734	8.3
75 Series	225/75R14C	8	115/113Q	1215	1150	68	6.0	226	689	8.4
	225/75R15C	8	110/108Q	1060	1000	55	6.0	224	715	8.5
	195/75R16C	10	110/108T	1060	1000	76	5.5	204	696	8.3
	215/75R16C	10	116/114R	1250	1180	76	6.0	221	724	8.5
70 Series	195/70R15C	8	104/102S	900	850	65	6.0	203	653	8.4
	205/70R15C	8	106/104S	950	900	65	6.0	209	668	9.0
	215/70R15C	8	109/107S	1030	975	65	6.5	225	681	9.0
	225/70R15C	8	112/110S	1120	1060	65	6.5	230	695	8.3
	215/70R16C	8	108/106S	1000	950	55	6.5	227	705	8.4
65 Series	195/65R16C	8	104/102T	900	850	68	6.0	201	657	8.4
	205/65R16C	8	107/105T	975	925	68	6.0	209	668	8.3
	215/65R16C	8	109/107T	1030	975	68	6.5	220	685	8.4
	225/65R16C	8	112/110T	1120	1060	68	6.5	226	694	8.4
	235/65R16C	10	121/119R	1450	1360	85	7.0	240	708	8.4






MK3000

For Pick-up Trucks and Transport Vehicles

MK3000



Rugged, aggressive & uniquely shaped blocks on inner ribs & shoulder blocks deliver superior grip in the most demanding condition.

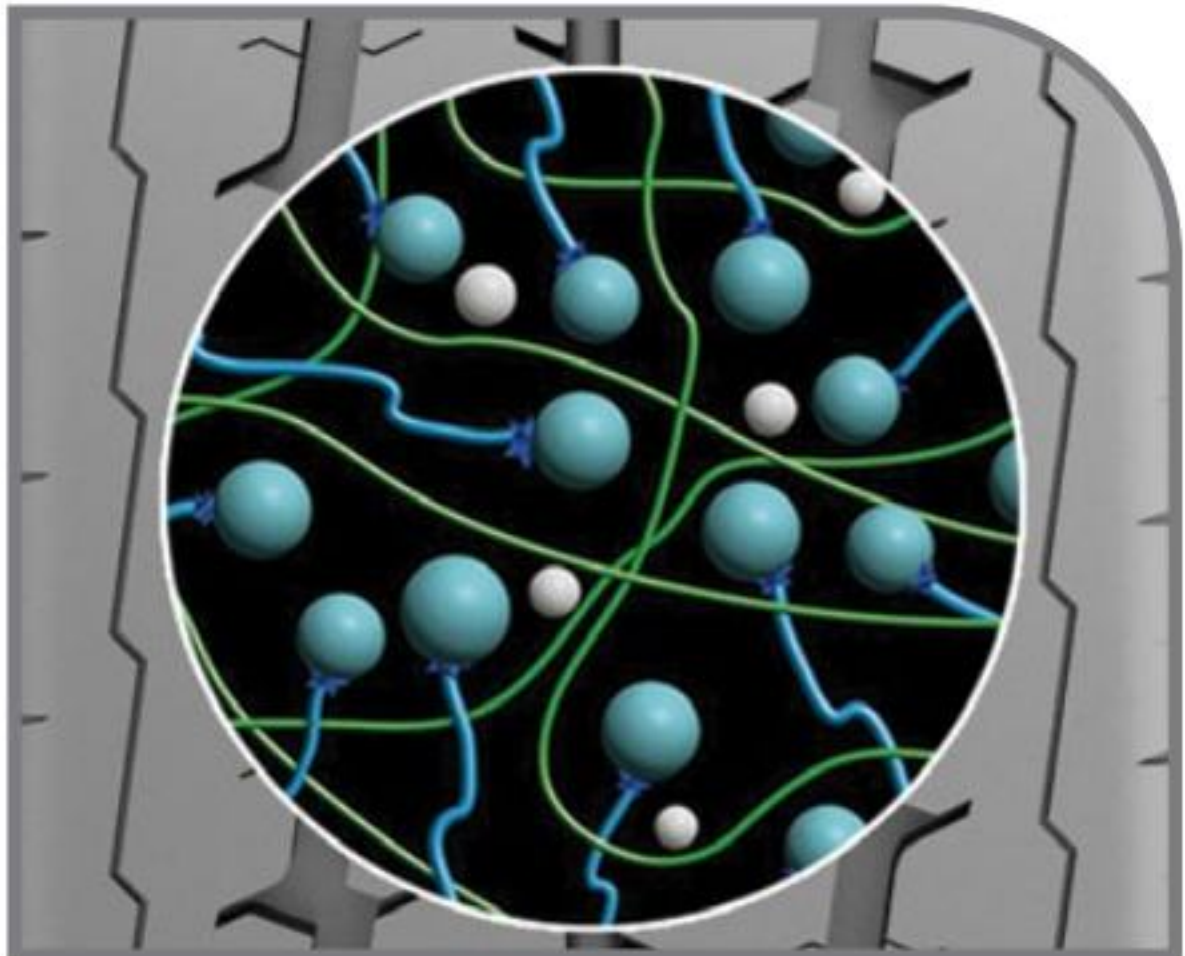

Special tread compound provide high mileage & low energy consumption.



Strong casing to ensure longevity usage.

Series	Size	PR	Load & Speed Index	Max Load (Single)	Max Load (Dual)	Max. Inflation Pressure	Rim Width	Section Width	Overall Diameter	Tread Depth
				kgs	kgs	psi	inches	mm	mm	mm
LTRC	195R14C*	8	106/104S	950	900	65	5.5	201	661	9.0
	205R14C	8	109/107Q	1030	975	65	6.0	213	680	9.3
	195R15C*	8	106/104Q	950	900	65	5.5	205	684	9.3

* Available in BSW & WSW sidewall styles





JABEL ALI FREE ZONE (SOUTH) P.O.
BOX:262176, DUBAI, U.A.E
www.zafco.com